

**OWNER'S MANUAL** 

# AEROULTRA

CONSTRUCTED WITH A SINGLE LAYER OF MILITARY-GRADE PVC SKIN, **AEROULTRA TECHNOLOGY** IS HIGHLY DURABLE BUT ALSO LIGHTER IN WEIGHT. THE INNER CORE OF OUR

AEROULTRAS HAS TENS OF THOUSANDS OF COMPOSITE DROP-STITCH FIBERS THAT MARRY

THE TOP AND BOTTOM HALVES OF THE CHAMBER. WHEN UNDER PRESSURE THE FIBERS


BECOME TAUGHT AND CREATE AN EXTREMELY RIGID, SOLID PLATFORM.



#### DEAR CUSTOMER.

CONGRATULATIONS ON YOUR PURCHASE OF A NEW INFLATABLE PADDLE BOARD. WE TAKE PRIDE IN BRINGING YOU A QUALITY PRODUCT WHICH WILL OFFER YOU YEARS OF PLEASURE. YOUR NEW BOARD IS AN INVESTMENT WHICH DESERVES YOUR CARE AND ATTENTION. PLEASE READ THIS ENTIRE MANUAL TO HELP YOU PROPERLY CARE FOR AND USE YOUR BOARD. IT CONTAINS DETAILS OF THE BOARDS WE OFFER, THEIR EQUIPMENT, FEATURES, AND INFORMATION ON THEIR OPERATION AND MAINTENANCE. READ IT CAREFULLY TO FAMILIARIZE YOURSELF WITH AEROULTRA BEFORE USING IT TO ENSURE SAFE USE AND PREVENT ACCIDENTS.

#### AEROULTRA CONSTRUCTION

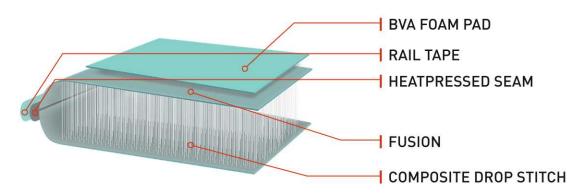

## INCLUDED


SHOWN BELOW ARE THE BASIC COMPONENTS THAT ARE INCLUDED WITH ALL THE AEROULTRAS WE OFFER.

ITEMS SHOWN BELOW MAY DIFFER SLIGHTLY FROM WHAT IS INCLUDED WITH YOUR BOARD




# **FEATURES**

BREEZE DIMENSIONS → 10'8" x 33"x 6" // 250lb TOTAL CAPACITY

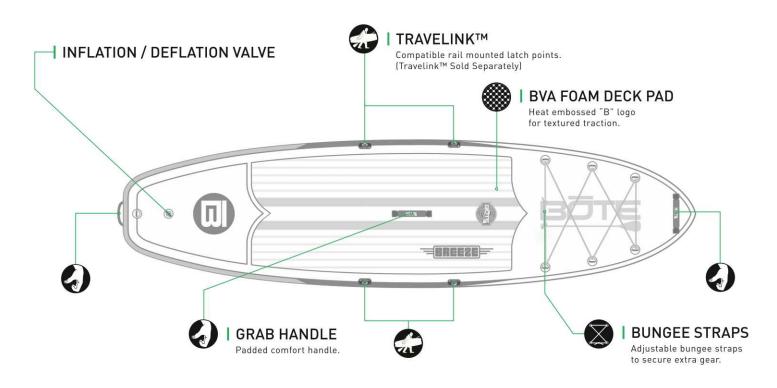



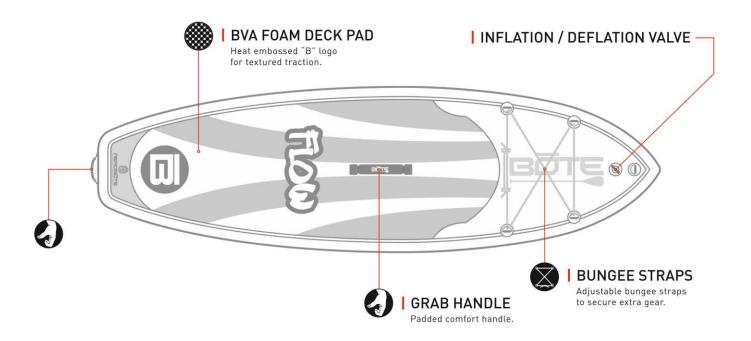



# READY TO USE STEPS TO INFLATE YOUR BOARD



1. Take items out of the bag and lay the board on a clean surface to roll out your SUP.



2. Remove safety cap from the inflation / deflation valve and attach the pump hose end to the valve, turning to the right to tighten.




3. Stand on the pump and begin to move the handle up and down. Make sure you pump directly up and down to avoid damaging the pump. Air will be pumped into the board on up and down strokes. If you are finding it hard on upward strokes, undo the cap found in the middle of the pump to allow air to only be pumped into the board on downward strokes, making it easier to pump.




- 4. As the board begins to inflate, the pressure gauge will start to move. Once the pressure gauge reaches between 12 and 15 PSI, detach the pump hose from the air valve and replace the safety cap.
- \*The pressure gauge will not read until it has reached 10 PSI.



- **5.** Attach your fin and leash (not included but recommended) and you are ready to hit the water! Enjoy!
- \*Always store your board in a cool, dry place or shady area out of reach of direct sunlight to avoid bursting or fading of colors. The sun both weakens the material and seams and increases the pressure beyond its design limits. If you must leave your inflated board out of the water and in direct sunlight or choose to store it partially inflated, reduce pressure until the board is compressible by hand.



1. When you are finished with the board, make sure to clean off any dirt, sand or salt water with fresh water. Then allow the board to dry or dry with a towel. Also remove accessories such as the fin and leash. When ready, remove safety cap and push down on the central valve head to release initial air.



**2.** After approximately 15 seconds, push down all the way and twist the valve head clockwise to lock air valve open for the remaining air to escape.



**3.** Begin to roll up the board from the end opposite the air valve making sure to push any remaining air towards the valve. Make sure to roll the board so that the deck pad is on the inside to keep main components safe during storage.



**4.** Once fully rolled up, use the compression strap to neatly store the SUP back in the carry bag.



**5.** When storing your SUP, keep it in a clean dry place.

# **ACCESSORIES**

### **AEROPUMP**

WANT YOUR BOARD INFLATED FASTER? THE **AEROPUMP\*** IS A HIGH PRESSURE 12 VOLT ELECTRIC STAND UP PADDLE BOARD PUMP. THE AEROPUMP COMES WITH A CAR PLUG AS WELL AS BATTERY CLAMPS SO YOU CAN INFLATE/DEFLATE YOUR BOARD ON THE GO.



## TRAVELINK™ SLING

BOTE BOARD INNOVATORS HAVE FOUND THE MISSING LINK IN THE NEW PATENT PENDING **TRAVELINK™ CARRY SYSTEM\***. THE TRAVELINK™ SYSTEM WAS DESIGNED TO GET YOU TO YOUR PADDLING SPOT MORE EASILY, COMFORTABLY, AND WITHOUT 'DEAD ARM' SYNDROME. BY SIMPLY CLICKING IN THE TRAVELINK™ ADJUSTABLE CARRY STRAP TO THE D-RINGS ON THE RAIL OF THE BOARD, YOU REMOVE ALL WEIGHT FROM YOUR HANDS AND CARRY THE BOARD MORE SAFELY AND ERGONOMICALLY WITH YOUR SHOULDERS AND BACK. AFTER A FEW SAND DUNE CLIMBS AND GUSTS OF WIND, YOU'LL WONDER HOW YOU EVER CARRIED YOUR SUP WITHOUT TRAVELINK™.

#### \*SOLD SEPARATELY



## COILED LEASH

SAFETY MEETS FUNCTIONALITY AND COMFORT - OUR 10' **COILED LEASH\*** WILL PERFORM TO THE HIGHEST STANDARD IN ANY CONDITIONS, FEATURING A KEY POCKET AND PADDED VELCRO ANKLE CLASP.

\*SOLD SEPARATELY



## AEROGO RECHARGABLE PUMP

THE **AEROGO RECHARGEABLE PUMP\*** MAKES SHORT WORK OF INFLATING (AND DEFLATING) YOUR AERO PRODUCTS. JUST CONNECT THE HOSE, SET THE PSI, AND GO. DON'T WORRY ABOUT FINDING AN OUTLET OR HOOKING UP TO A CAR BATTERY, THE AEROGO WILL INFLATE AND DEFLATE YOUR AERO PRODUCTS AN AVERAGE OF 2-3 TIMES ON A SINGLE CHARGE. IT EVEN COMES IN ITS OWN CONVENIENT CARRY BAG.

#### \*SOLD SEPARATELY



# MINOR REPAIRS

You can repair small punctures with the included repair kit (A). Please note that in order for the repair to be successful, the humidity level should be less than 60%, temperature between 65°f/77°f or 18°c/25°c. Avoid carrying out repairs in the rain or in direct sunlight.

- 1. Draw the shape of the patch exactly where it will be applied, use a round patch from the supplied patch kit at least 2"/5 cm larger than the cut/damaged area.
- 2. Clean the damaged area and the corresponding side of the patch with a grease remover of the alcohol type and allow for it to dry for 5 minutes.
- 3. Apply 3 thin layers of glue on both the patch and the damaged area, allow for it to dry for 5 minutes between layers until the glue feels tacky.
- 4. When the third layer of glue is dry, apply the patch without pressing and adjust the positioning if required, press the air bubbles which may have formed under the patch by smoothing the patch with a round object such as a spoon, do this procedure by starting in the center of the patch towards the outside, clean the excess glue with a solvent. Drying: 12 hours.



## **CAUTION**

Perform all of your repairs in a wellventilated area. Avoid inhaling glue vapors or swallowing.

Avoid contact with skin and eyes. Keep all repair materials (glue, solvents, etc.) away from children's reach.

<sup>\*</sup>Repairs on the seams must not be glued.

# **WARRANTY**

BOTE® makes every effort to produce boards to the highest quality and standards in the industry. We do quality checks in our factories and warehouses in an effort to guarantee each board's quality before shipping to Authorized BOTE Dealers or directly to the customer. Because of the nature of paddle boarding we cannot warranty the performance of any board or shape for individual riders and varying levels of skills and abilities. Furthermore, we cannot guarantee against damage or breakage and cannot protect or warranty against circumstances outside of our control.

#### WARRANTY REGISTRATION REQUIRED

The warranty registration form should be completed online within 30 days of original purchase to be activated. You should keep your sales receipt should it be required in the future for proof of purchase. The online Warranty Registration Form can be found at www.boteboard.com/support/warranty.

#### 2 YEAR LIMITED WARRANTY

For the original retail purchaser ("Consumer"), BOTE® provides a limited 2-year warranty from date of purchase against material or manufacturing defects in the hull and deck for a registered product.

#### LIMITATIONS AND EXCLUSIONS

This limited warranty does not apply to the following. Please visit www.boteboard.com/support/warranty for the complete list of limitations and exclusions.

- Normal wear and tear and aging of product.
- AeroULTRA damaged while in possession of a freight carrier, a dealer, Consumer, or any party other than BOTE®.
- AeroULTRA sold as "demos" or in "as is" condition.
- Cosmetic flaws or colors may vary from those shown. Cosmetic flaws or variations in color are not covered by warranty.
- Does not cover any puncture, cut or abrasion sustained in normal use or damage from unreasonable uses or improper storage.

#### **OBTAINING WARRANTY SERVICE**

If you have a problem with your BOTE or AeroULTRA and you suspect that it may be due to defective materials or workmanship, contact the dealer you purchased your BOTE from and arrange to have the problem inspected. Consumer is responsible for delivery to, and pickup from, the closest authorized dealer.

If you purchased the product directly from BOTE® or a BOTE® Retail Store, complete the online warranty claim form and await further instruction. Please visit www.boteboard.com/support/warranty to read the complete BOTE Warranty before using your new AeroULTRA.

