



Assembly Instructions

IMPORTANT

DO NOT RETURN THIS BATTING CAGE TO THE RETAIL STORE WHERE PURCHASED. **CALL TOLL FREE: (800) 492-9334**

WARNING:

USE ONLY LITE-BALLS & LITE-BALL PITCHING MACHINES WITH THIS CAGE
(REAL BASEBALLS & REAL BALL MACHINES MAY CAUSE SERIOUS INJURY!)
USE THIS PRODUCT WITH ADULT SUPERVISION ONLY.
SERIOUS BODILY INJURY MAY OCCUR! • READ WARNING LABELS CAREFULLY.



For additional products and accessories visit: **www.TrendSports.com**
95 West 650 South • St. George, Utah 84770 • PH: 800-492-9334 • PH: 435-656-1756 • Fax: 435-688-0741

PARTS LIST

9 Piece Bungee Fiberglass Frame

(Quantity - 2)

Part #A

(Comes with netting attached)



4 - Ground Stakes

Part #D

Rope Stakes & Support Ropes


(Quantity - 4)


Part #B

(Comes attached to netting)

Poly Netting with Pitching Machine Opening

Part #C

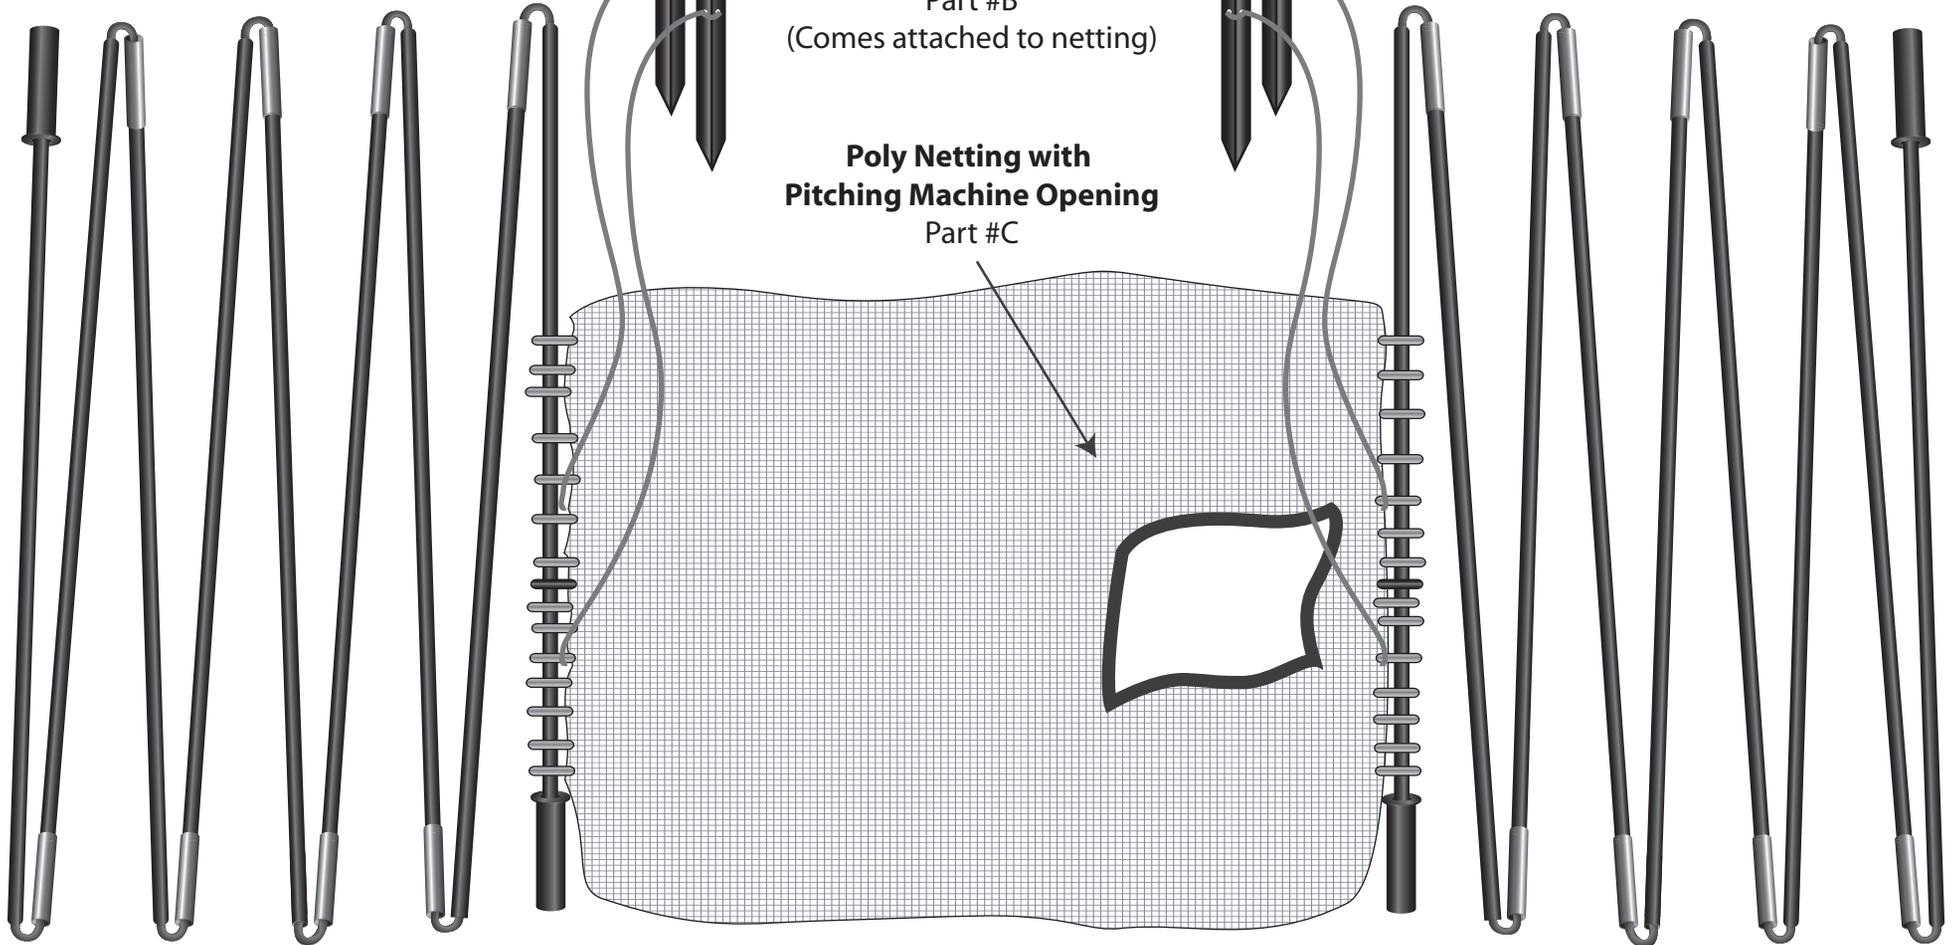

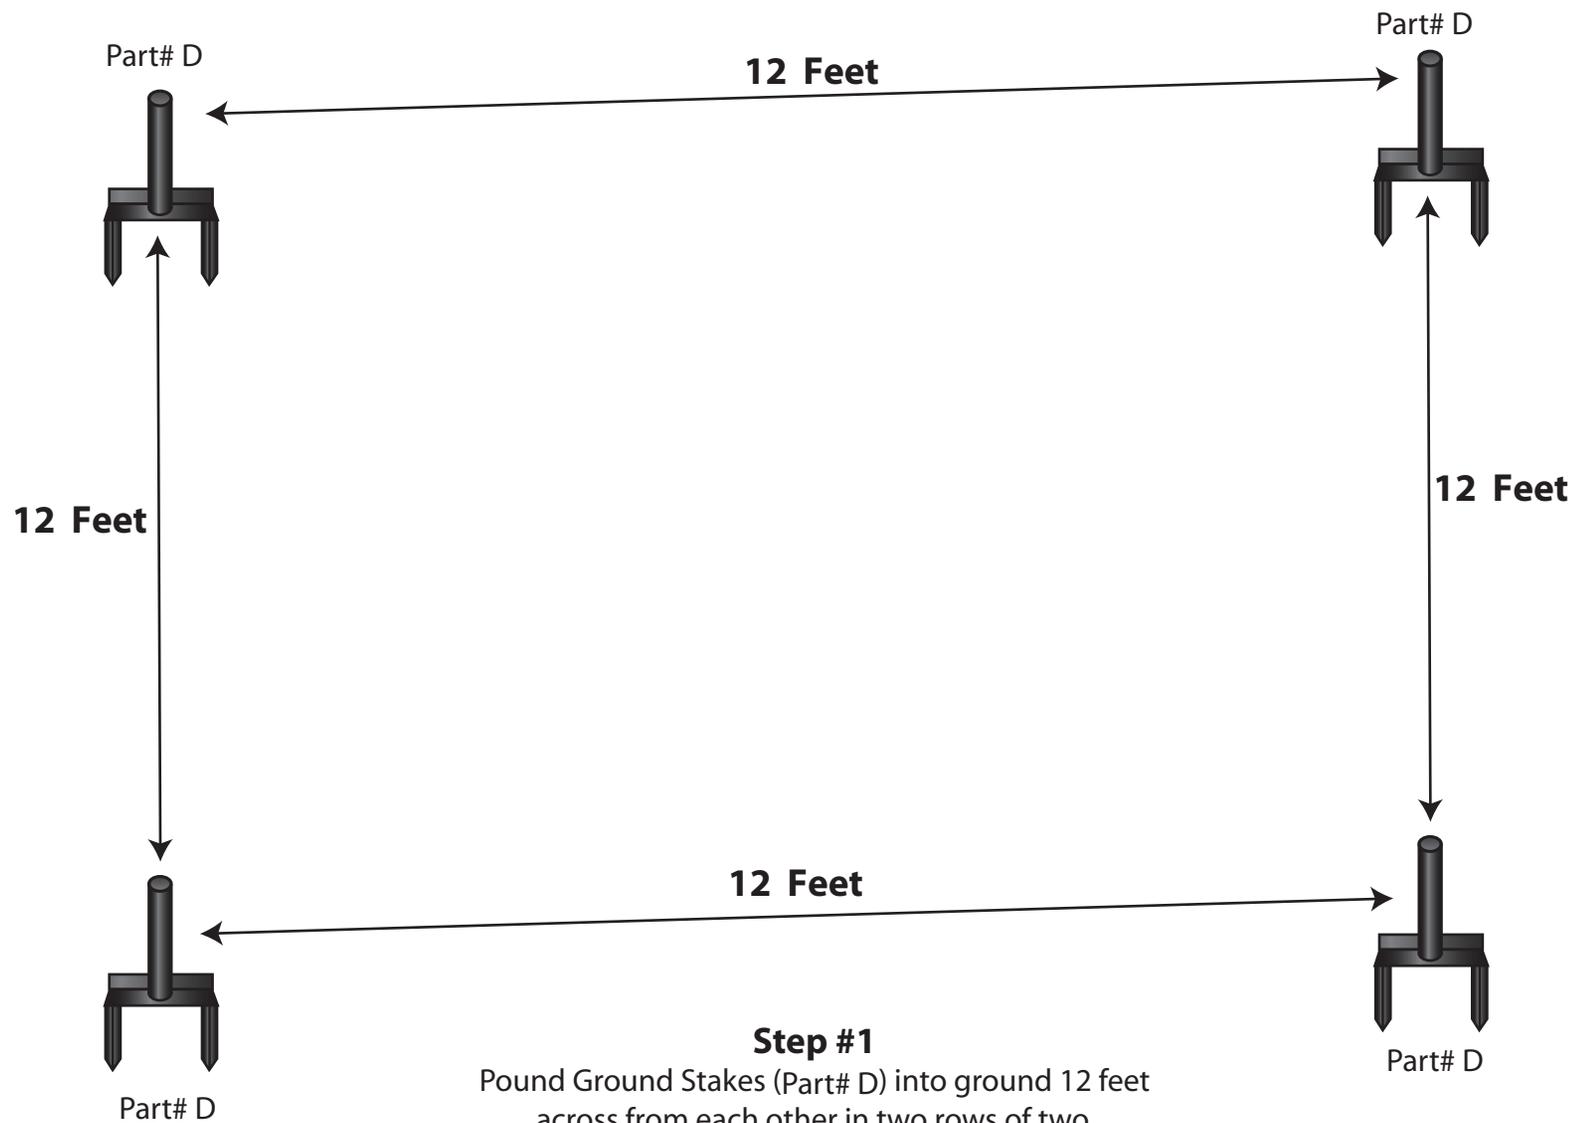

Step #1

Pound Ground Stakes (Part# D) into ground 12 feet
across from each other in two rows of two.
Each row needs to be 12 feet apart.
(See diagram)


Note:

Make Sure Stakes Are Perfectly Straight Up And Down.
(Caution: Do not pound on the stake top. Damage could prevent
frame from inserting properly)

STEP 2

Assemble both Fiberglass Frames by inserting each pole end into the adjoining metal joint.

(Note: Make sure not to pinch the bungee cord)

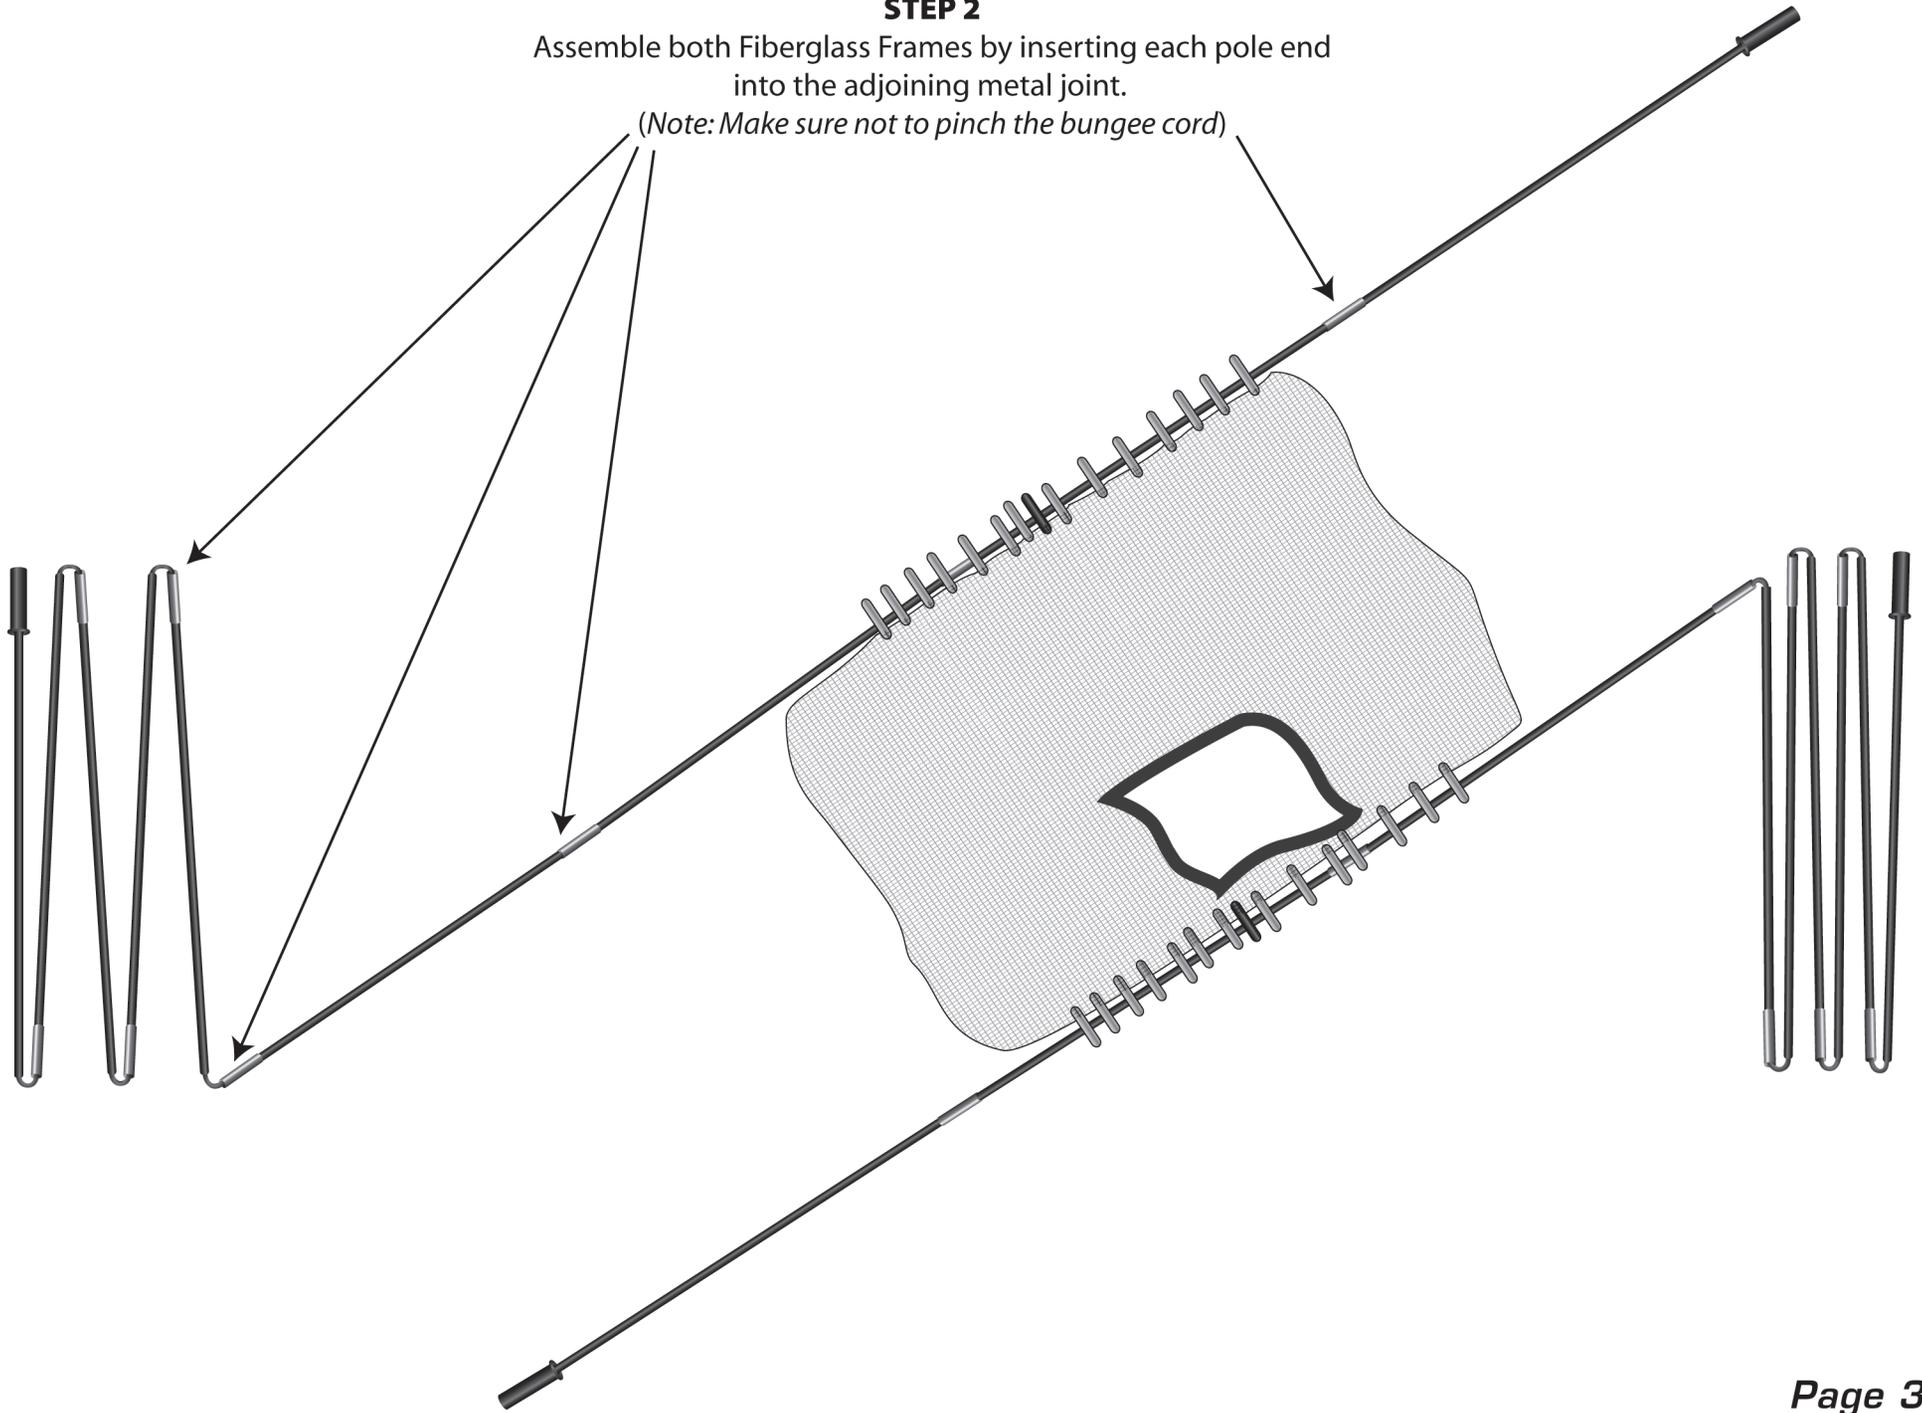

Step #3


Insert each of the fiberglass pole ends into the ground stakes by arching the poles to form the cage.

Note: Make sure the "Red" center ring is positioned at the top peak of the cage.



(Net with poles inserted and attached to ground stakes)

Pole Section

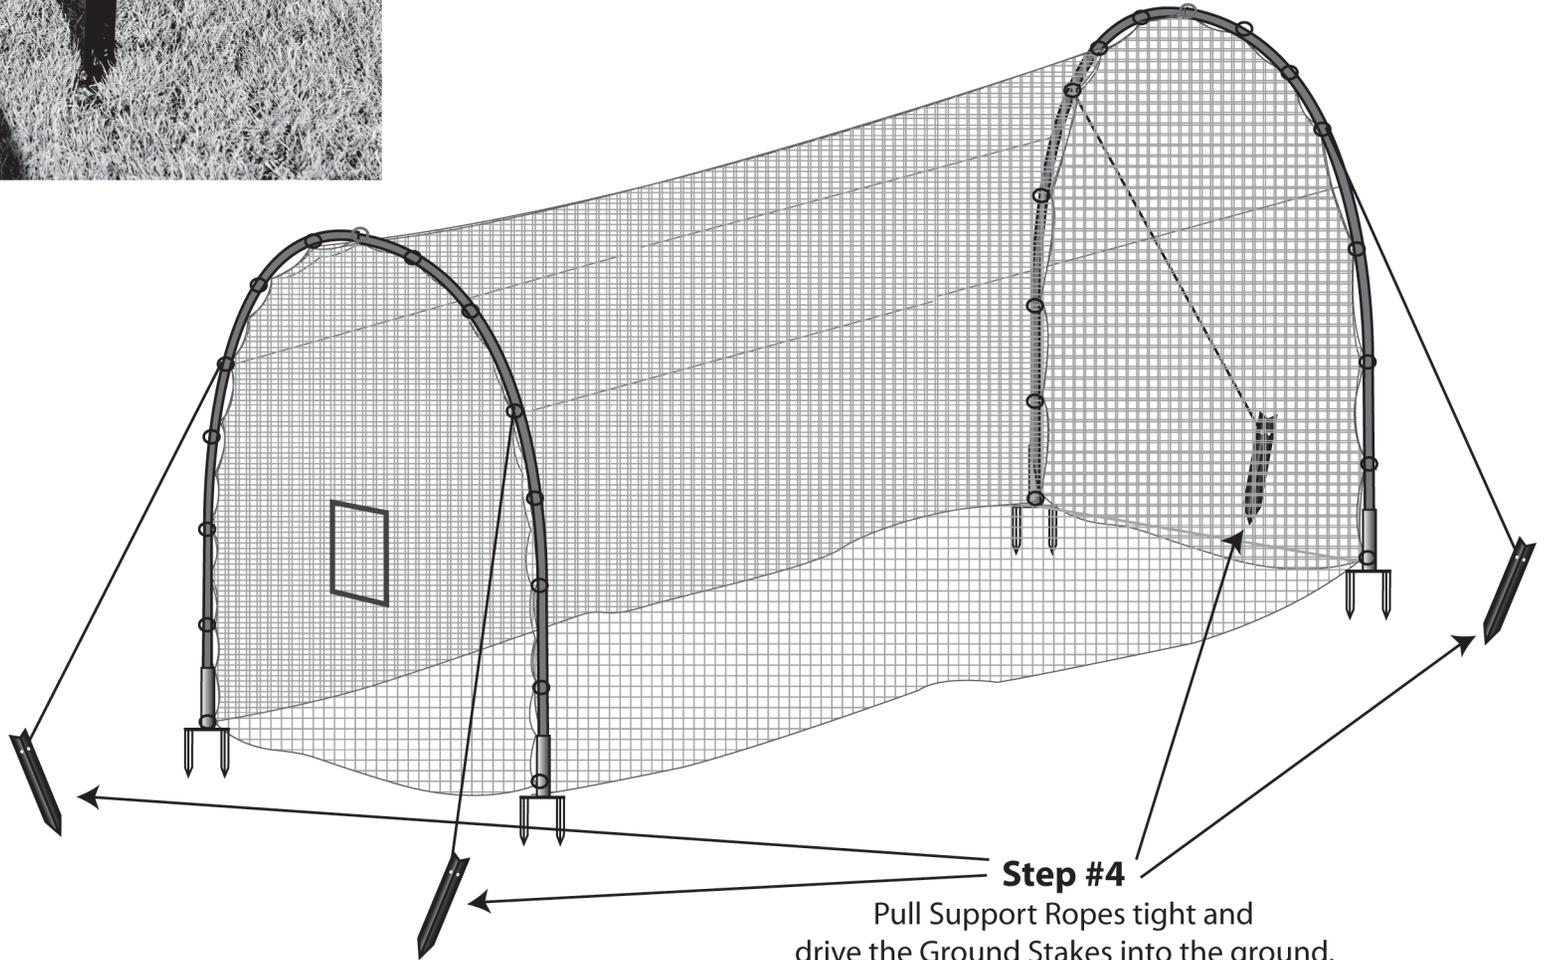

Step #4


Pull Support Ropes tight and drive the Ground Stakes into the ground.

Step #5

To adjust the height of the Pitching Machine Opening,
Gather the Netting where the Support Rope Clips to the Frame Ring.
After determining the desired height, push the Netting into the Clip.
Do this for both sides of the Opening.



*Gather Netting and push into the
Support Rope clip to
adjust the opening height.*

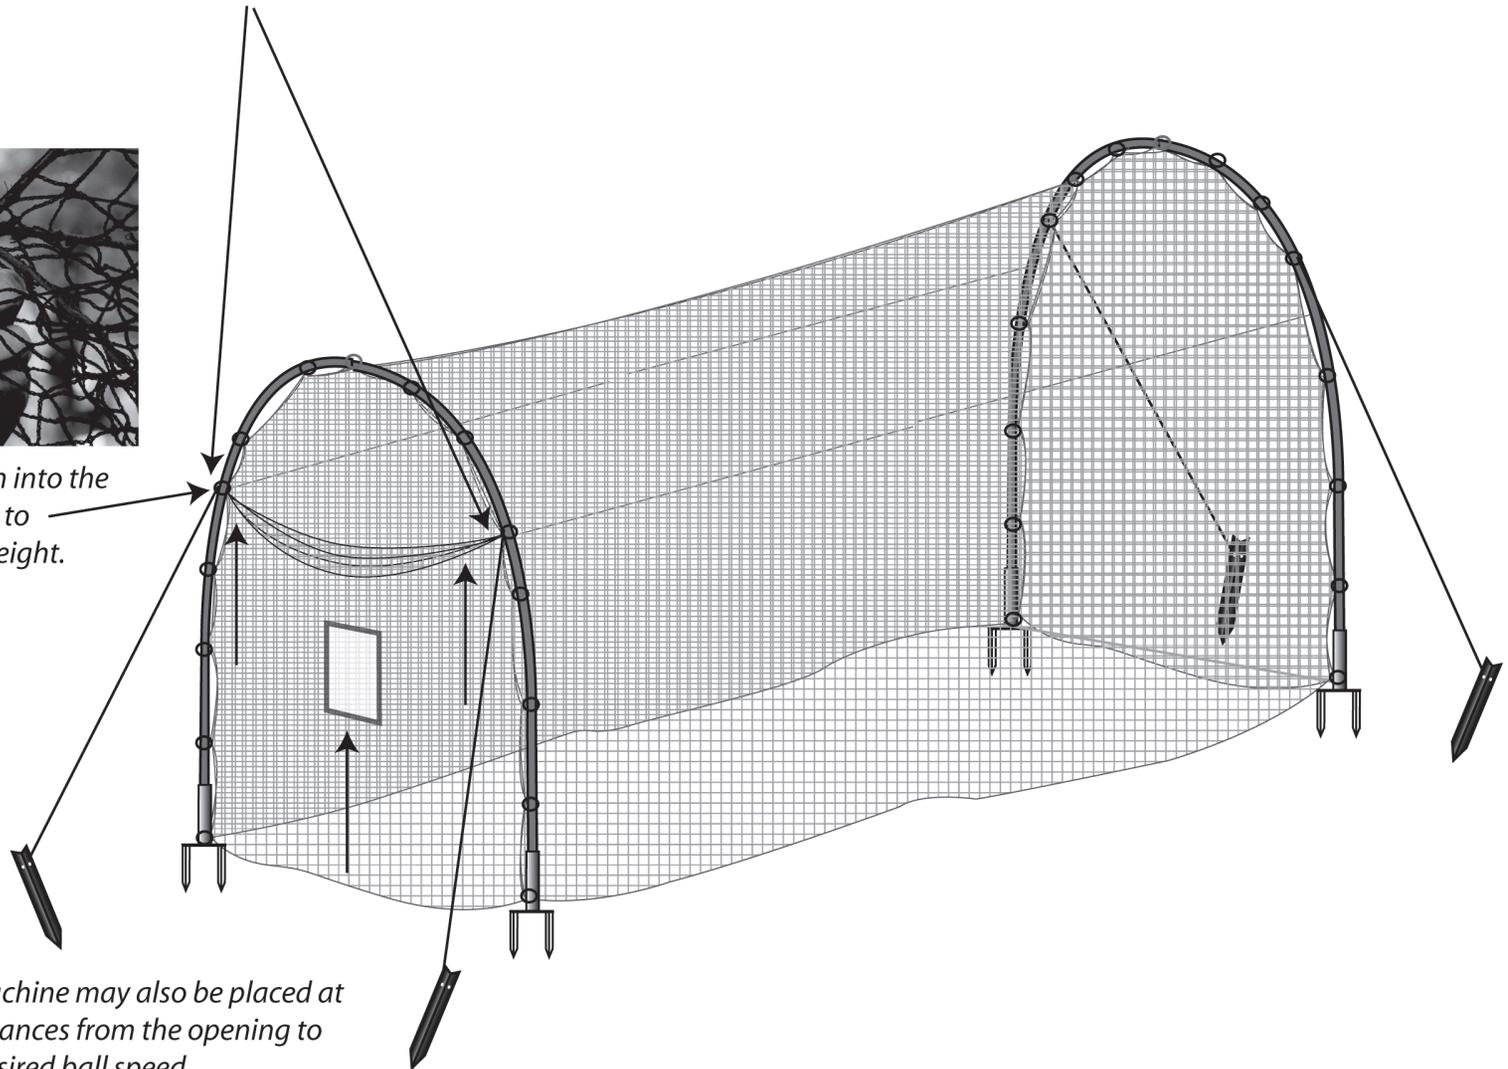

Note: *The Pitching Machine may also be placed at
shorter or longer distances from the opening to
get the desired ball speed.*