

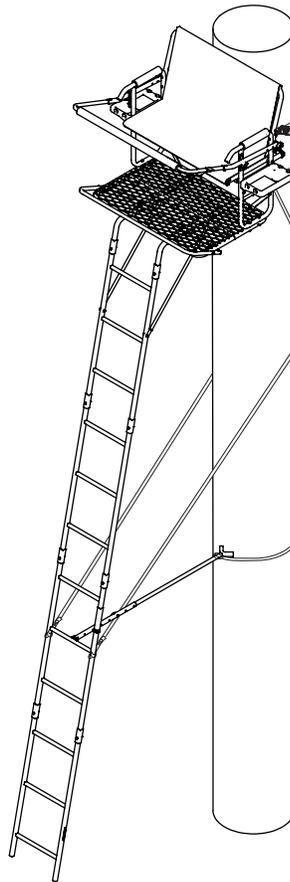


GAME WINNER™

Instruction Manual

PLATFORM 2-MAN LADDER STAND

MODEL #: PL201GW
STYLE #: 161727



Maximum Height
18' to Shooting Rail

Maximum Field Rating
500 lbs

Tree Diameter Range
12" to 20"

Wear Your Harness!



ATTENTION

YOU MUST READ ALL WRITTEN INSTRUCTIONS AND WATCH THIS SAFETY VIDEO BEFORE USING!



WATCH THIS SAFETY VIDEO BEFORE USING!

Scan →



or Visit →

www.standsafety.com/r3

Scan the QR code with your smart phone, tablet or similar device.

OR

Type the website address into your web browser to view an important safety video before using this product.

LADDER STAND SAFETY

For parts call our Customer Service Center at 800-345-6007

Business Hours: 8:00 am to 5:00 pm CST

© 2020 RETI All Rights Reserved | 34376 REV1: 02/04/20 | CN: 34358

TABLE OF CONTENTS	PAGE
--------------------------	-------------

Warranty Information	2
Warnings.....	3-4
Parts List.....	5-9
Tools Required	9
Hardware	9-12
Product Diagram.....	13
Finished Ladder.....	14
Assembly Instructions	15-21
Installation and Use Instructions	22-25
Inspections and Maintenance	26
Notes.....	27

Note: Before beginning assembly of product, make sure all parts are present. Compare parts list with package and hardware contents. If any part is missing or damaged do not attempt to assemble the unit. Contact customer service for replacement parts.

WARRANTY

RETI offers a **one year warranty** for all components of the treestand. These warranties apply to the original owner with a proof of purchase. These warranties begin on the date of purchase by the first retail consumer and continue for the period specified above. These warranties apply to products that are not modified, abused or used in a manner that deviates from the product’s intended usage. Minor fading in color is normal and is not covered by warranty. Any corrosion of painted surfaces that occurs as a result of paint being removed or damaged is also not covered by warranty. RETI offers no other warranty expressed or implied. Products for which warranty work has been approved must be sent directly to RETI and performed by RETI. **To obtain warranty service and/or replacement instructions, you must obtain prior approval from RETI before shipping your package to us by calling our customer service department at 800-345-6007 or by writing to: Ardisam, Inc., P.O. Box 755, 1160 Eighth Avenue, Cumberland, WI 54829 for a return material authorization number (RMA#).** All items must be shipped prepaid. RETI will, at no charge, repair or replace, in RETI’s sole discretion, any product that satisfies the conditions stated above. RETI retains the right to change models, specifications and price without notice.

This equipment has been manufactured under strict quality and safety guidelines. As with any equipment of this type, full understanding of the instructions and its use is mandatory and imperative for the safety of its user. RETI is not responsible for any damages or injuries sustained due to improper use or modification of any of its products, or resulting from any use which deviates from the product’s intended usage. RETI is not responsible for any injuries sustained due to failure to read and adhere to the instructions for use. Any misunderstanding or questions regarding the products of their use should be directed to RETI prior to any use. It is the owner’s sole responsibility to inspect the product regularly for damage, improper installation, or conditions that could jeopardize the ultimate safety of the product. Failure to use or improper use of a Fall Arrest System may result in serious injury or death. **ALWAYS wear a Fall Arrest System while using this product. Owner is responsible to understand and follow product field weight rating and must never exceed maximum weight rating.** RETI is not responsible for any malfunction or injury resulting from normal wear and tear, damage caused by improper use, improper maintenance, negligence or accidents. This product, if used safely as intended, will provide trouble free service for the useful life of the product. We hope you will enjoy the quality of our products for years to come, and have a safe hunt.


STOP
READ AND UNDERSTAND THE FOLLOWING WARNINGS BEFORE ASSEMBLY
MODEL PL201GW
MAXIMUM USE HEIGHT - 18' TO SHOOTING RAIL
MAXIMUM OCCUPANCY - TWO (2) PERSONS
TOTAL WEIGHT LIMIT - 500 LB
TREE DIAMETER RANGE - 12" TO 20"

WARNING

- ▲ This product carries strict height and weight restrictions. **Do Not** use this product if you exceed the total weight limit. Please note that the total weight limit includes the user(s) and their equipment.


WARNING

- ▲ **When hunting from a treestand falls can occur any time after leaving the ground causing injury or death.**
- ▲ **Always** wear a Fall Arrest System (FAS) comprising a full body harness at all times after leaving the ground. You must stay connected at all times after leaving the ground while using climbing and hang-on treestands. Single safety belts and chest harnesses are no longer allowed and shall never be used. If you are not wearing a full body harness properly attached to the tree that is protecting you from a fall, do not leave the ground.
- ▲ **Read and understand** all of the manufacturer's Warnings and Instructions and use all safety devices provided by the manufacturer. Contact the manufacturer for any questions. Failure to do so could result in injury or death.
- ▲ **Never** exceed the total weight limit of the treestand.
- ▲ **Never** use a treestand during inclement weather such as rain, lightning, windstorms or icy conditions and end your hunt and return to the ground if inclement conditions arise.
- ▲ **Never** use a treestand while using drugs (even prescription drugs) or alcohol.
- ▲ **Never** use a treestand while feeling ill, nauseous or dizzy, or if you have a prior medical condition that could cause a problem, that is, heart condition, joints that lock-up, spinal fusions, etc., or if you are not well rested. **Never** sleep in stand.
- ▲ **Never** use a treestand on a dead, leaning, diseased or loose barked tree, or a utility pole. **Always** avoid electrical power lines.
- ▲ **Never** rely on a tree branch for support.


WARNING

- ▲ **Never** jump or bounce on a treestand to seat it to the tree.
- ▲ Pull up a bow, backpack, or firearm or other equipment only after being secure in the treestand and a firearm must be pulled up with it unloaded, chamber open, and muzzle down.
- ▲ **Always** inform someone of the hunting location, where the treestand will be located and the expected duration of the hunt.
- ▲ A signal device such as a mobile phone, radio, whistle, signal flare or personal locator device (PLD) must be on your person and readily available at all times.
- ▲ Inspect the treestand and all safety devices each time before use and **Do Not** store a treestand outdoors when not in use.
- ▲ **Never** modify your treestand in any way by making repairs, replacing parts, or altering it except if explicitly authorized in writing by the manufacturer.
- ▲ Practice installing, adjusting and using your treestand at ground level prior to using it at elevated positions. Study your new stand to become familiar with all of its features and design. Doing so will confirm that the product is manufactured, assembled and installed correctly.
- ▲ Instructions (written and video) shall be kept in a safe place and reviewed at least annually. It is the responsibility of the treestand owner to furnish the complete instructions to any person who borrows or purchases the treestand.
- ▲ Use at least three (3) people to install or take down a ladder treestand.
- ▲ The criss-cross straps/ropes and stabilization devices must be attached before climbing to the platform.
- ▲ When installing a ladder stand, always bounce on the first rung to set the ladder into the ground according to manufacturer's instructions before proceeding to climb any higher.
- ▲ Check every ladder section connection every time you use the stand before you leave the ground. If ladder sections are separating, do not use the stand.
- ▲ Check the ground under the stand to make sure it is firm and level. Sloping ground or uneven surface (one side on a rock) can cause your ladder to tilt or shift off the tree as you climb.
- ▲ **Always** maintain three (3) points of contact when climbing a ladder treestand. Proper three-point contact means having either two feet with one hand or one foot with two hands on the step portion of the ladder or climbing aid at all times.


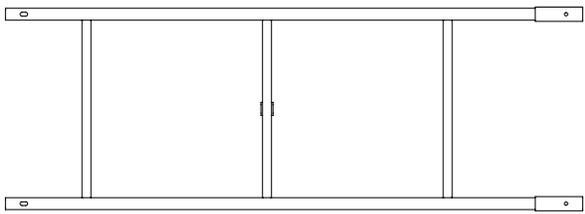
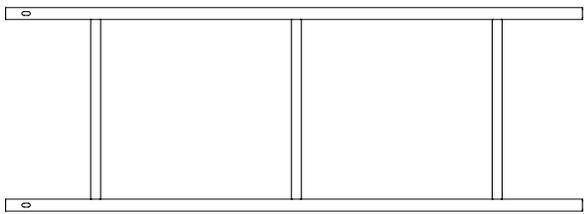
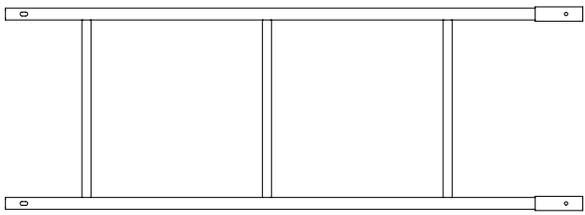
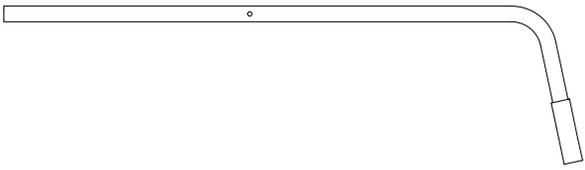
 **WARNING**

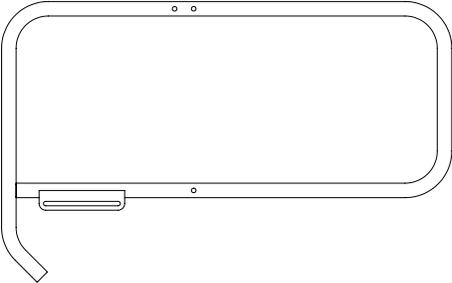
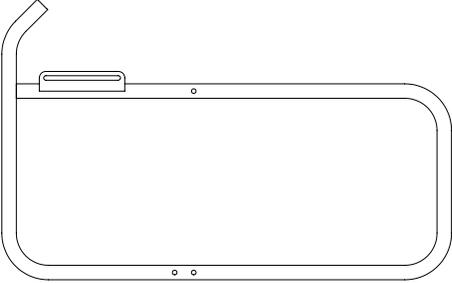
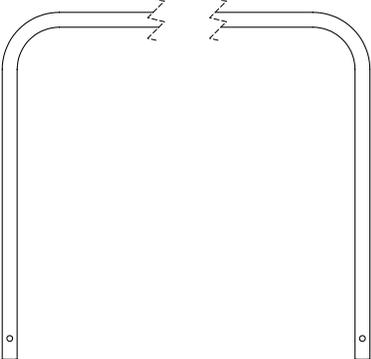

- ▲ **Always** lean forward as you climb and attach your harness to the tree before securing the platform to the tree and stepping onto the platform.
- ▲ **Never** exceed the stated maximum use height.
- ▲ **Do Not** use this product until you have watched the safety video, understand it, and practiced the techniques for safe hunting discussed in this video. The video can be found with the QR code and/or URL shown on front cover of this manual.
- ▲ Read and perform all inspection and maintenance tasks before each and every use. Replace any questionable components immediately with RETI original replacement parts.
- ▲ **Do Not** crush tubing when tightening bolt assemblies! Identify and familiarize yourself with all parts before you start. Bolt identification chart can be found on the following page of the manual.
- ▲ Double check assembly steps to be certain you have correctly assembled this product.
- ▲ **Never** use any product that has not been maintained or inspected properly - Your life depends on it!
- ▲ Replace any and all treestand straps every two years or when any signs of damage or wear exist before.
- ▲ **Always** wear the appropriate footwear when using a ladder treestand. A good non-slip safety boot is important to your personal safety. Be especially careful that boot laces do not get hooked on the stand or any of its components (tuck shoelaces into boots before climbing).


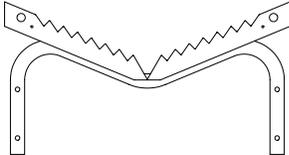
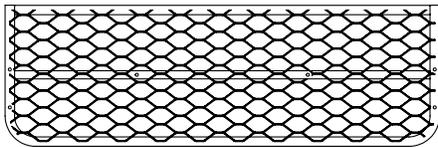
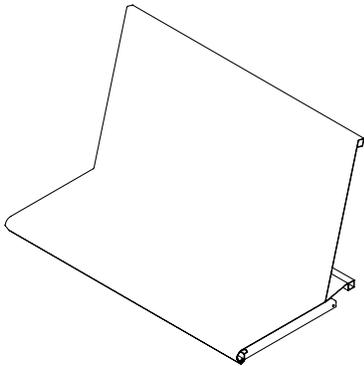
 **WARNING**

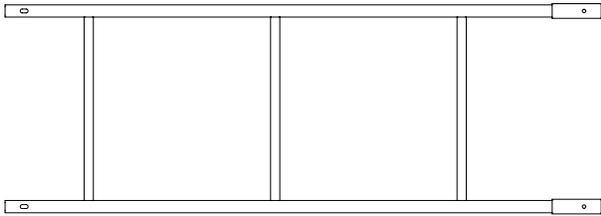
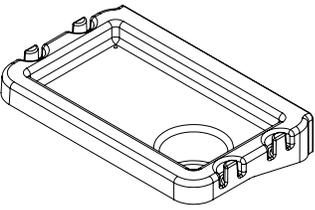
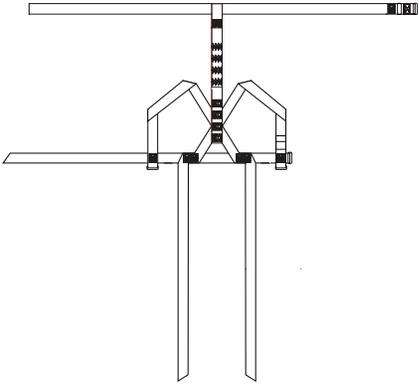
- ▲ **Only** use approved RETI parts. Failure to do so may result in serious injury or death!



PARTS LIST

Item	Part No.	Description	Image	Qty
1	# 33142	STABILIZER BAR EXTENSION		1
2	# 34243	BRACE PLATFORM ANGLED		2
3	# 34244	BRACE PLATFORM TO LADDER		2
4	# 34257	BOTTOM LADDER SECTION		1
5	# 34258	MIDDLE LADDER SECTION		1
6	# 34259	TOP LADDER SECTION		1
7	# 34260	J-TUBE		2

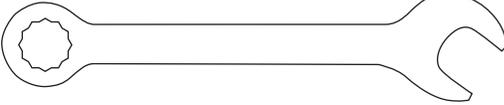
Item	Part No.	Description	Image	Qty
8	# 34262	SIDE SEAT SUPPORT LEFT		1
9	# 34263	SIDE SEAT SUPPORT RIGHT		1
10	# 34264	SHOOTING RAIL		1
11	# 34265	SHOOTING RAIL INSERT		2
12	# 34268	BACKREST		1

Item	Part No.	Description	Image	Qty
13	# 34269	SEAT SUPPORT		1
14	# 34273	STABILIZER BAR		1
15	# 34274	BOTTOM TREE BLADE		1
16	# 34275	PLATFORM		2
17	# 34297	FOOTREST		1
18	# 34300	TOP TREE BLADE		1
19	# 34363	SEAT		1


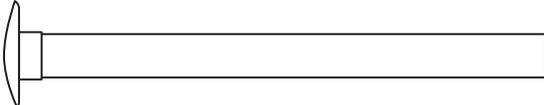
Item	Part No.	Description	Image	Qty
20	# 34462	MIDDLE LADDER SECTION		1
21	# 34474	SHELF WITH HOOKS		2
22	# 34267	FOAM SLEEVE 9 INCH		2
23	# 36284	FOAM PAD ADHESIVE BACKED		2
24	# 34266	FOAM SLEEVE 36 INCH		1
25	# 10531	HARNESS		2

Item	Part No.	Description	Image	Qty
26	# 48415	RATCHET STRAP WITH S HOOKS		2
27	# MK034-4511	16' CRISS-CROSS STRAP		2
28	# MK021-1401	6' CAM BUCKLE STRAP		1






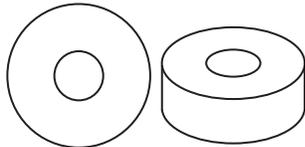
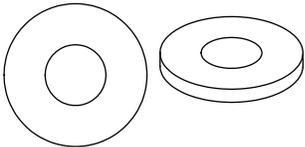
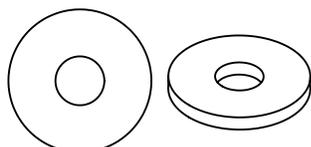
TOOLS REQUIRED (INCLUDED)


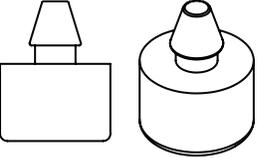
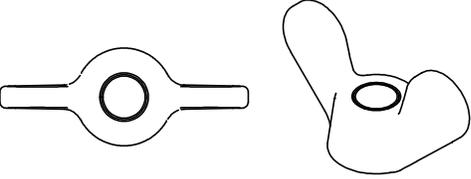
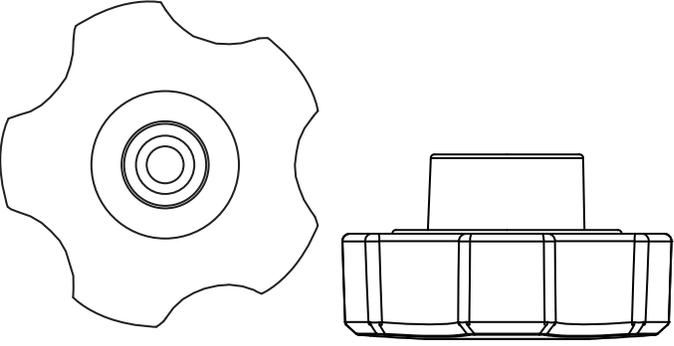
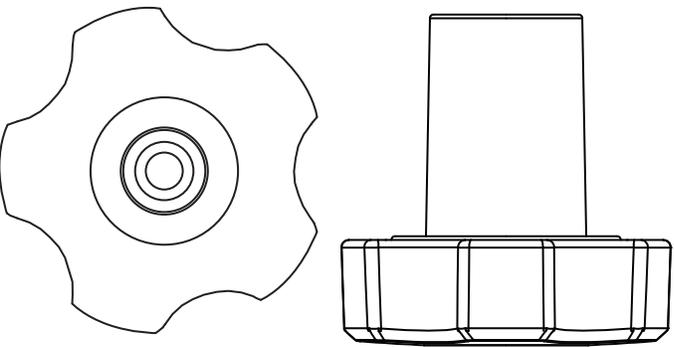
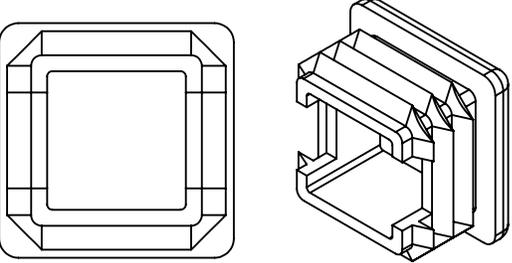
-	# 32563	7/16" WRENCHES		2
---	---------	----------------	---	---

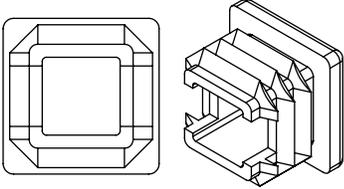
HARDWARE LIST (TO SCALE)

Item	Part No.	Description	Image	Qty
29	# 8909B	BOLT 1/4-20 X 1-1/4 IN		2
30	# 26813	BOLT M6 X 20 MM		2
31	# 34136	BOLT M6 X 70 MM		2

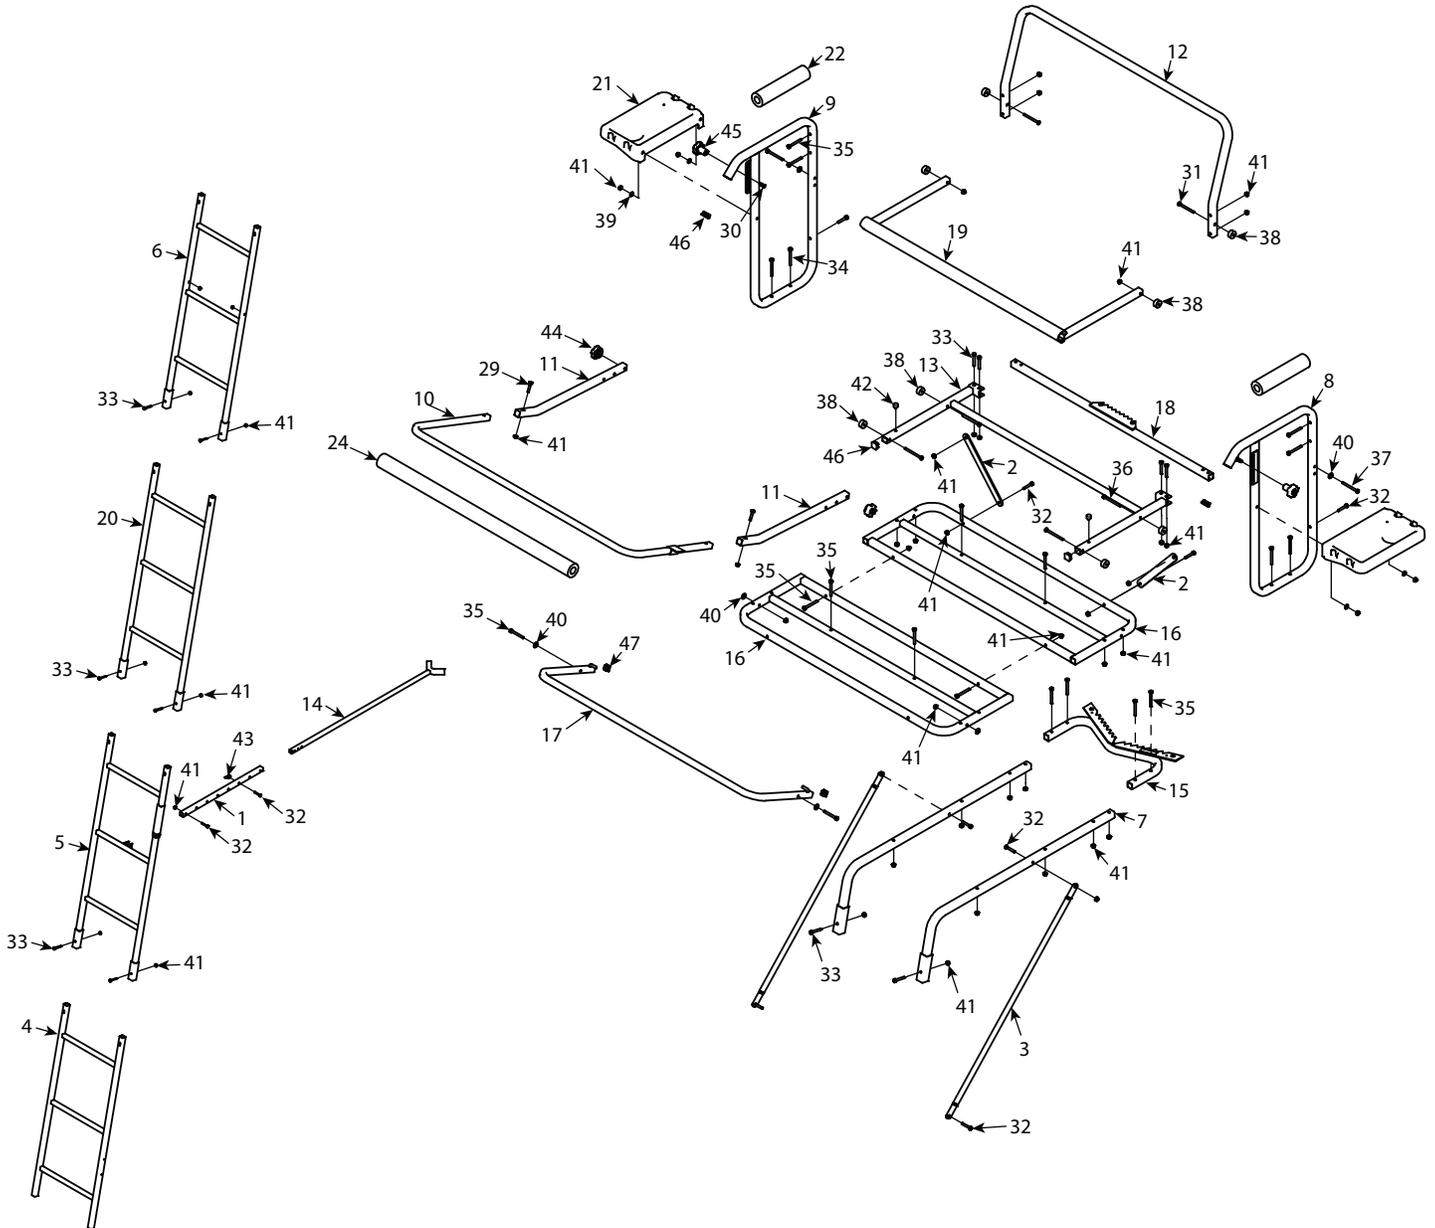
HARDWARE LIST (TO SCALE)

Item	Part No.	Description	Image	Qty
32	# 48240B	BOLT 1/4-20 X 1-1/2 IN		10
33	# 48250B	BOLT 1/4-20 X 1-3/4 IN		12
34	# 48270B	BOLT 1/4-20 X 2-1/2 IN		4
35	# 48271B	BOLT 1/4-20 X 2-1/4 IN		16
36	# 48280B	BOLT 1/4-20 X 3 IN		4
37	# 67540B	BOLT 1/4-20 X 2-3/4 IN		2
38	# 10347	PLASTIC SPACER		8
39	# 48261B	WASHER 1/4 IN		4
40	# 32205	ORANGE WASHER		6

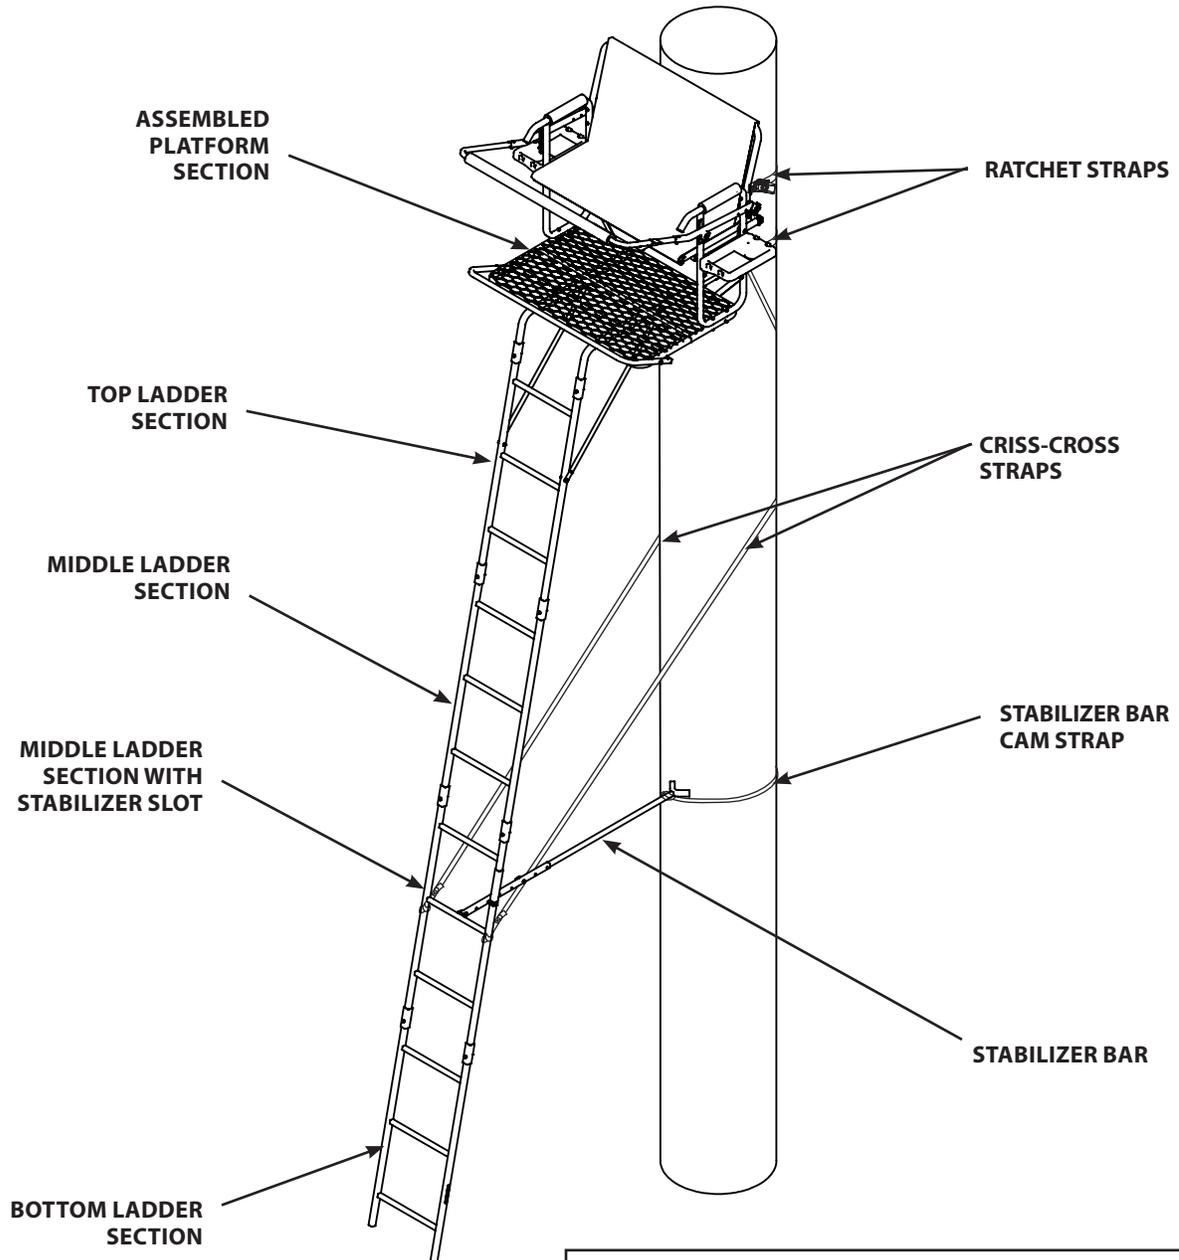
Item	Part No.	Description	Image	Qty
41	# 48752B	NUT 1/4-20		49
42	# 48679	RUBBER BUMPER STOP		2
43	# 48042B	WING NUT 1/4-20		1
44	# 23604	KNOB M6 X 10 MM		2
45	# 28839	KNOB M6 X 29 MM		2
46	# 29712	SQUARE PLUG 22 MM		4

Item	Part No.	Description	Image	Qty
47	# 29713	SQUARE PLUG 19 MM		2

PRODUCT DIAGRAM



FINISHED LADDER



All assembly must be done in the order on the following page at ground level before uprighting.

Do not remove labels/warnings from product, they are there for your safety.

Recommended for adult use only.

ASSEMBLY INSTRUCTIONS

Do not tighten any nut and bolt combinations completely until all parts are assembled together! Finger tighten plus one turn of a wrench only! This will temporarily hold the locknut on the bolt while helping alignment of all parts! After all parts are assembled together, all nut and bolt combinations must be completely tightened.

STEP 1

NOTE: When selecting a tree to install the treestand in, never use a treestand on a dead, leaning, diseased or loose barked tree, or a utility pole. Always avoid electrical power lines.

1. Attach platform sections (16) together using two 1/4-20 x 2-1/4 IN bolts (35) and locknuts (41). **SEE FIGURE 1.**

NOTE: Platform sections must be oriented as shown in FIGURE 1.

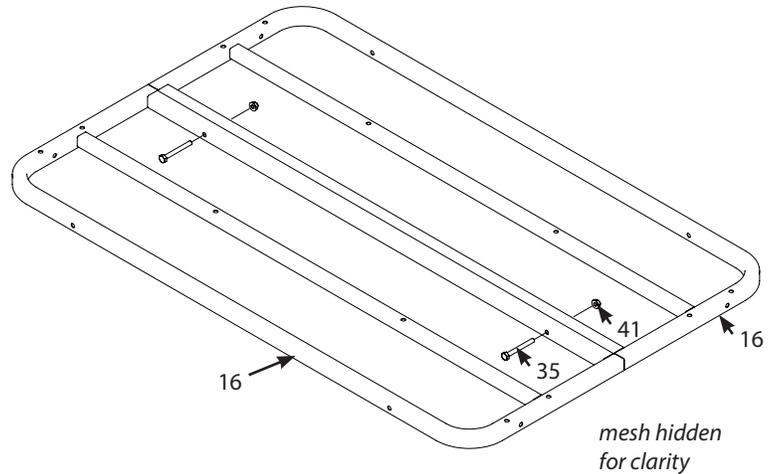


FIGURE 1

STEP 2

2. Attach platform sections (16) to J-tubes (7) using four 1/4-20 x 2-1/4 IN bolts (35) and locknuts (41). **SEE FIGURE 2.**

Attach bottom tree blade (15) to J-tubes (7) using four 1/4-20 x 2-1/4 IN bolts (35) and locknuts (41). **SEE FIGURE 2.**

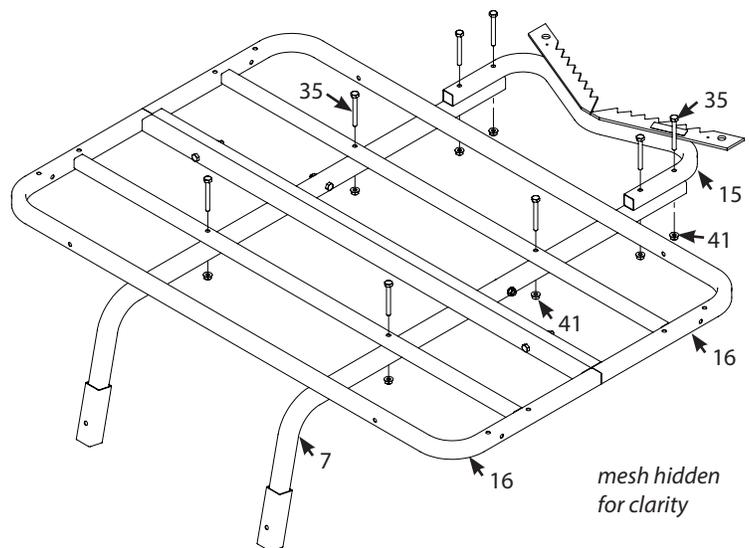


FIGURE 2

STEP 3

- Attach left (8) and right (9) seat supports to platform sections (16) using four 1/4-20 x 2-1/2 IN bolts (34) and locknuts (41). **SEE FIGURE 3.**

Attach platform braces (2) to platform section (16) and both left (8) and right (9) seat supports using four 1/4-20 x 1-1/2 IN bolts (32) and locknuts (41). **SEE FIGURE 3.**

NOTE: Be sure seat supports are installed correctly as shown in FIGURE 3.

Attach armrest pads (22) to left (8) and right (9) seat supports.

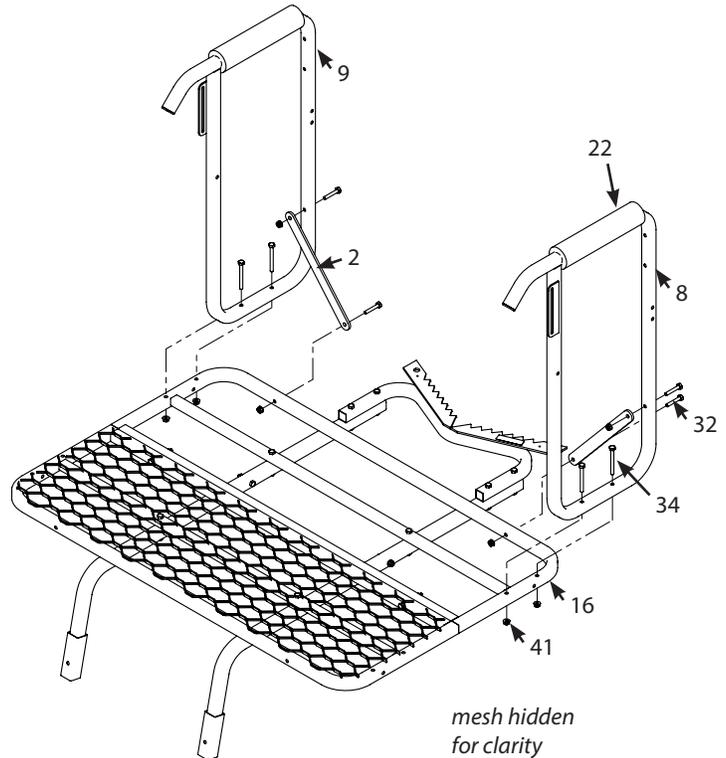


FIGURE 3

STEP 4

- Attach seat support (13) and shelves (21) to left (8) and right (9) seat supports using four 1/4-20 x 3 IN bolts (36), steel washers (39), plastic spacers (38) and locknuts (41). **SEE FIGURES 4 AND 4A.**

Install rubber bumpers (42) into seat support (17).

NOTE: Be sure that hardware is oriented as shown in FIGURE 4 AND 4A.

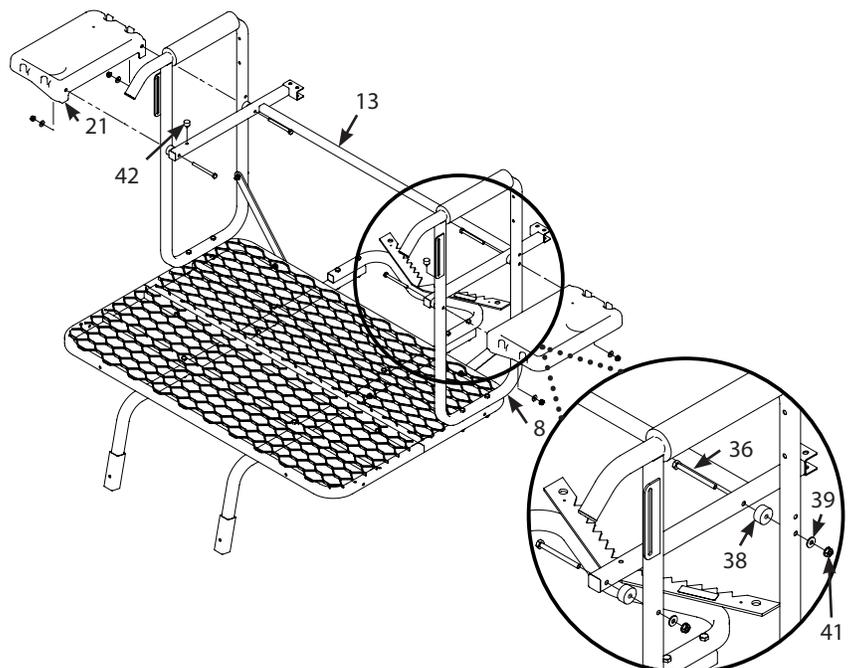


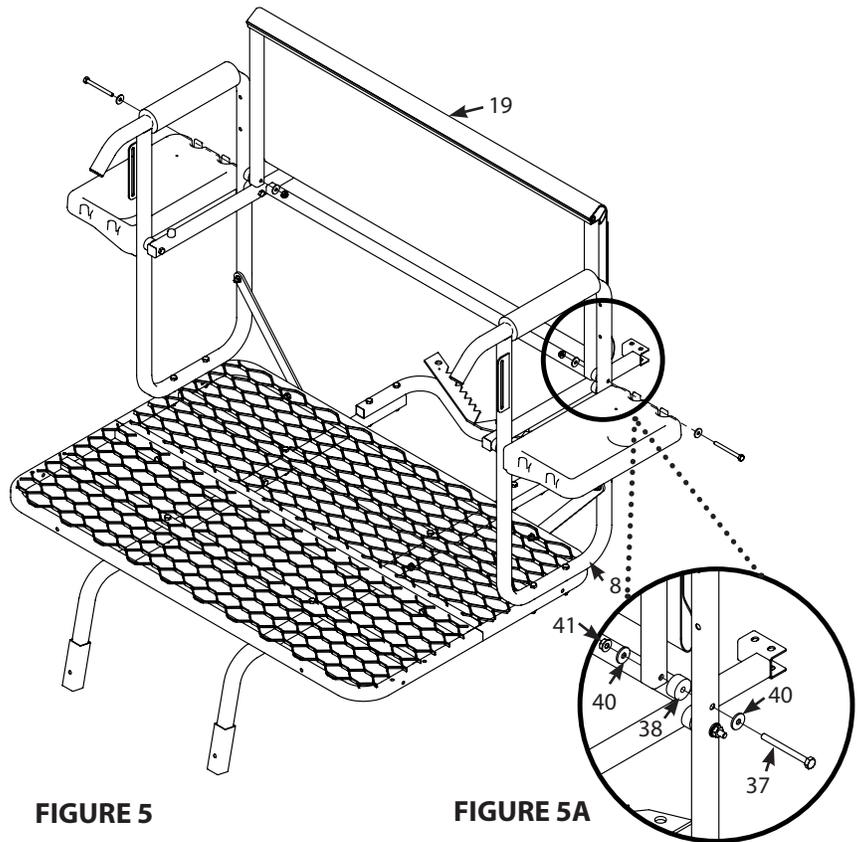
FIGURE 4

FIGURE 4A

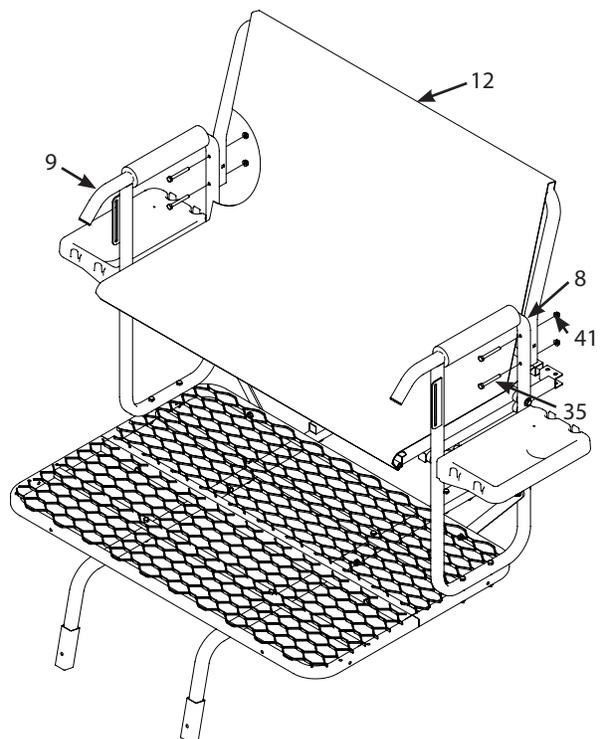
STEP 5

5. Secure rear of the seat assembly (19) to left (8) and right (9) seat supports using two 1/4-20 x 2-3/4 IN bolts (37), four orange plastic washers (40), two plastic spacers (38) and locknuts (41). **SEE FIGURE 5.**

NOTE: Be sure hardware is oriented as shown in FIGURE 5.


FIGURE 5
FIGURE 5A
STEP 6

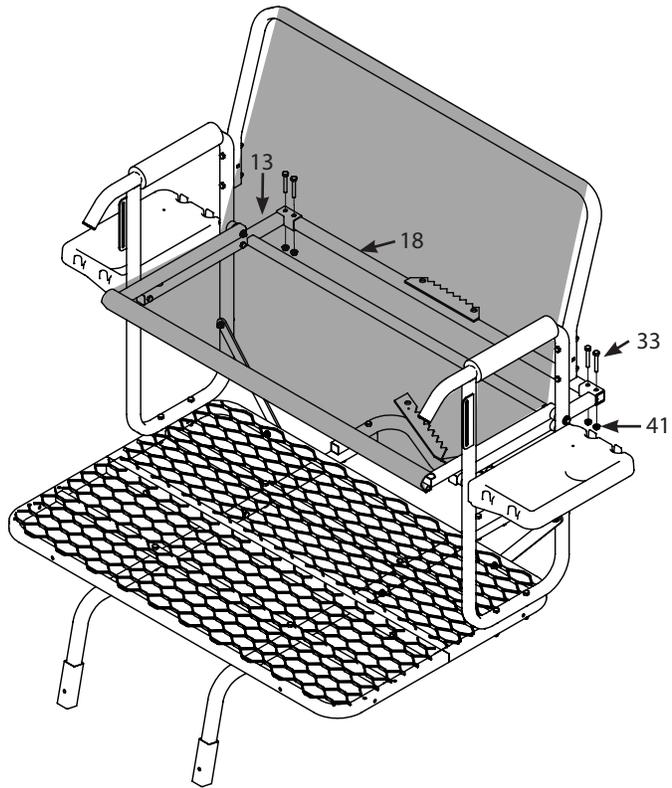
6. Install backrest (12) by sliding into sleeve on top of seat assembly (19) and orienting as shown behind left (8) and right (9) seat supports, and securing in place using four 1/4-20 x 2-1/4 IN bolts (35) and locknuts (41). **SEE FIGURE 6.**


FIGURE 6

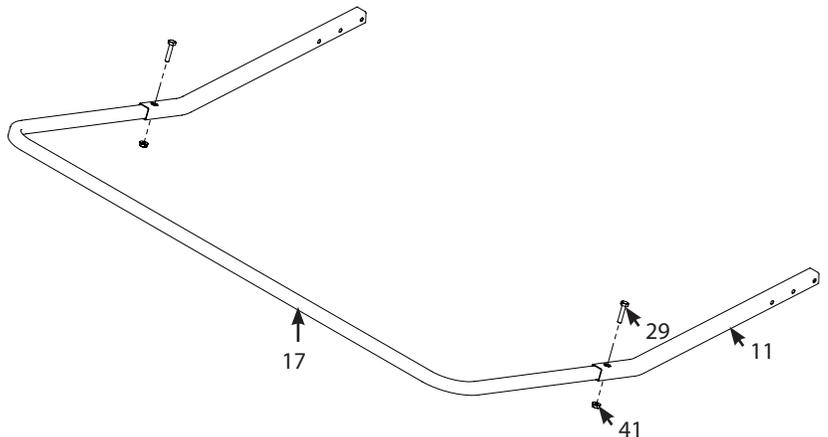
STEP 7

- Slide top tree blade (18) through sleeve on rear of seat assembly (19) so that top tree blade is centered on hole in seat assembly (19). Install top tree blade (18) into brackets on ends of seat support (13) and secure using four 1/4-20 x 1-3/4 IN bolts (33) and locknuts (41). **SEE FIGURE 7.**

NOTE: Flipping seat up during Step 10 will make it easier to install top tree blade (18) into seat support (13).

**FIGURE 7****STEP 8**

- Attach a shooting rail insert (11) to each end of shooting rail (10) using a 1/4-20 x 1-1/4 IN bolt (29) and locknut (41) on each side. **SEE FIGURE 8.**

**FIGURE 8**

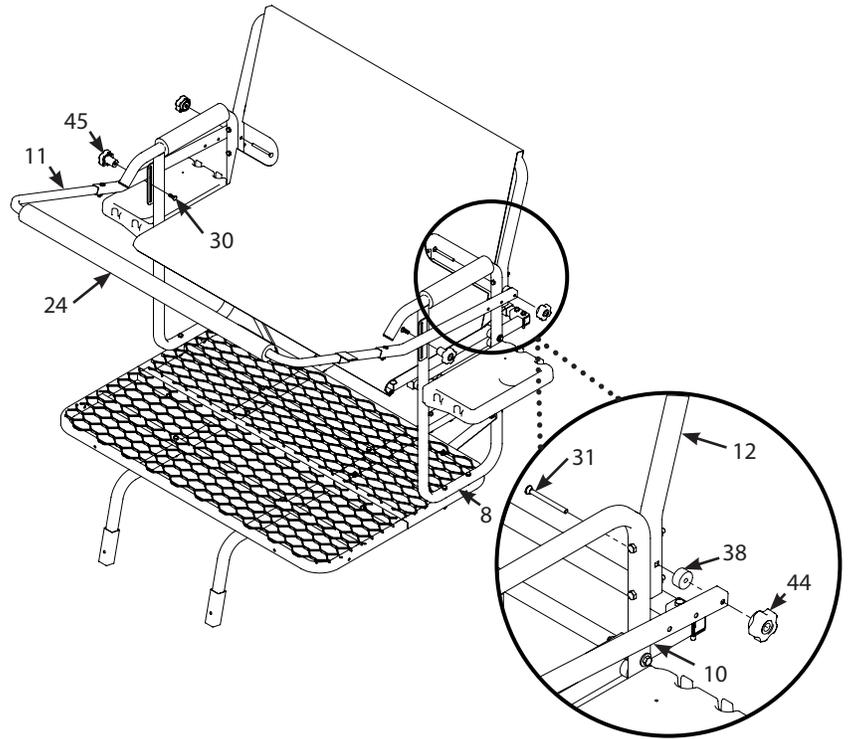
STEP 9

9. Install M6 x 29 MM knobs (45) and M6 x 20 MM bolt (30) onto left (8) and right (9) seat supports. **SEE FIGURE 9.**

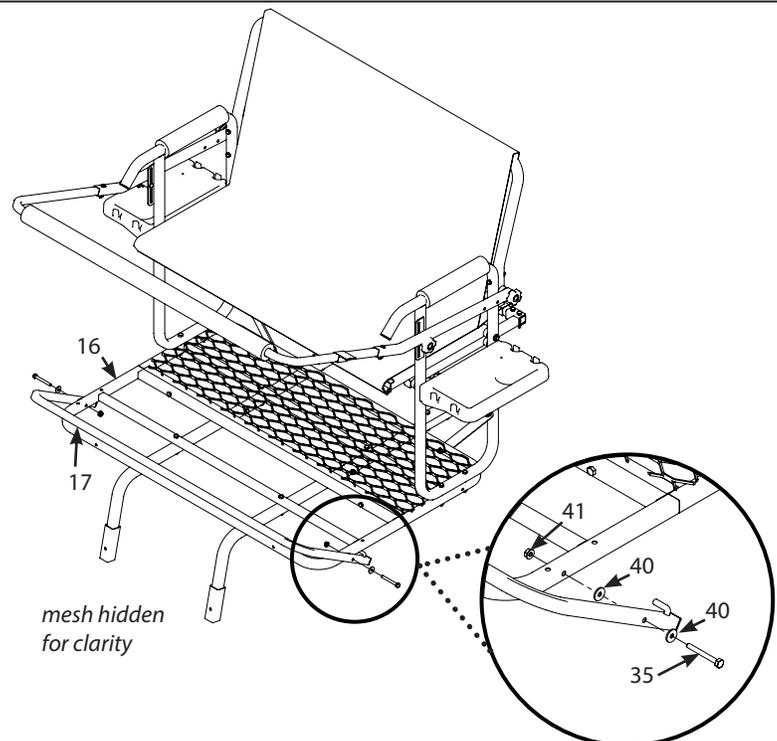
Attach shooting rail assembly (11 and 17) to backrest (12) using two M6 x 70 MM bolts (31), plastic spacers (38) and M6 x 10 MM knobs (44). **SEE FIGURES 9 AND 9A.**

NOTE: Be sure hardware is installed as shown in FIGURE 9. Depth of the shooting rail is also adjustable at this time.

Attach shooting rail pad (24) to shooting rail (11).


FIGURE 9
FIGURE 9A
STEP 10

10. Attach footrest (17) to front platform section (16) using two 1/4-20 X 2-1/4 IN bolts (35), four orange plastic washers (40) and two locknuts (41). **SEE FIGURES 10 AND 10A.**


FIGURE 10
FIGURE 10A

STEP 11

11. Attach one end of brace supports (3) to J-tubes (7) underneath platform using two 1/4-20 x 1-1/2 IN bolts (32) and locknuts (41). **SEE FIGURE 11.**

Slide top ladder section (6) into J-tubes (7) and secure using two 1/4-20 x 1-3/4 IN bolts (33) and locknuts (41). Secure other ends of brace supports (3) to top ladder section (6) using two 1/4-20 x 1-1/2 IN bolts (32) and locknuts (41). **SEE FIGURE 11.**

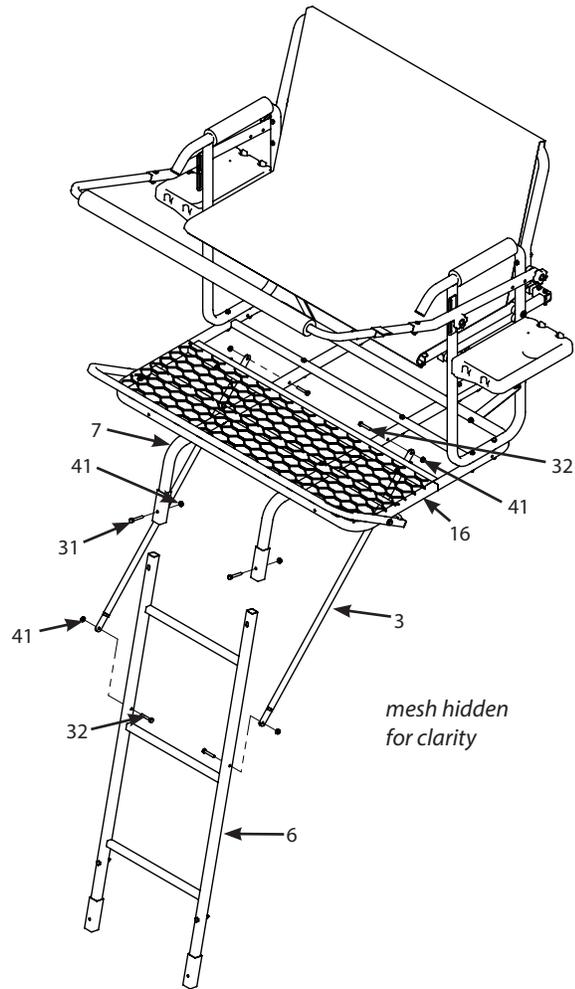
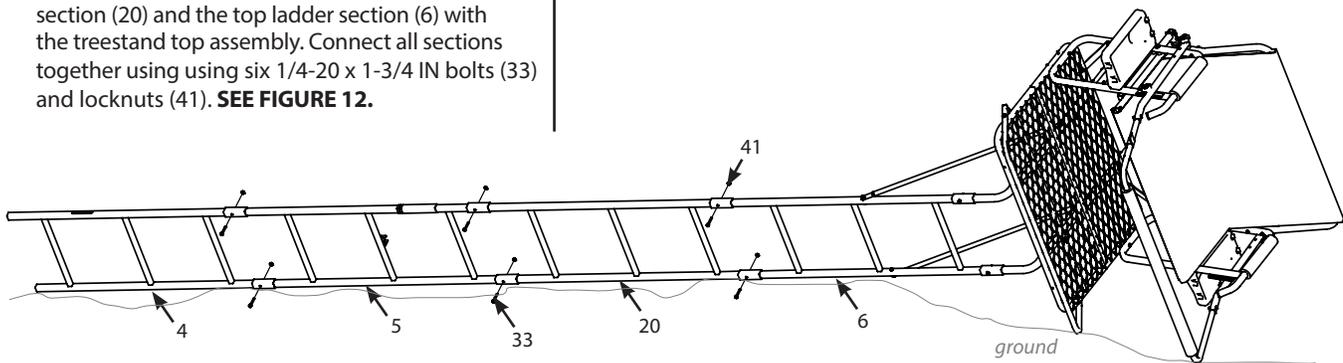


FIGURE 11

STEP 12

12. Ladder sections are assembled on the ground in the following order: bottom ladder section (4), middle ladder section with bracket (5), middle ladder section (20) and the top ladder section (6) with the treestand top assembly. Connect all sections together using using six 1/4-20 x 1-3/4 IN bolts (33) and locknuts (41). **SEE FIGURE 12.**

FIGURE 12 (shown below)



STEP 13

13. Attach the stabilizer bar extension tube (1) to the middle ladder section (5) through the mounting bracket with one 1/4-20 X 1-1/2 IN bolts (32) and one 1/4-20 nut (41). **SEE FIGURE 13.**

Slide the stabilizer bar (14) into the extension tube (1) and attach the two pieces together using one 1/4-20 X 1-1/2 IN bolt (32) and one wing nut (43). The bolt must go through both the extension tube (1) and stabilizer bar (14) at appropriate hole to achieve desired distance from tree. Adjustment in length may be needed when ladder is uprighted later in Installation and Use Instructions. **SEE FIGURE 13.**

NOTE: Treestand should ALWAYS be fully assembled on the ground prior to mounting it in the tree.

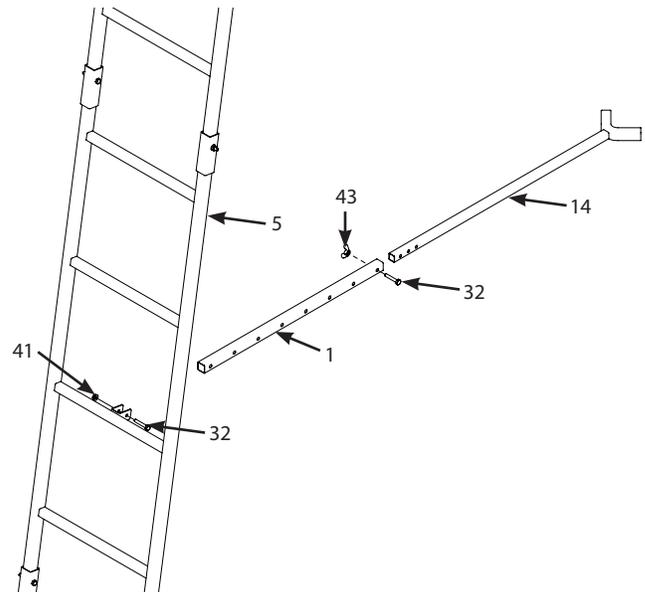


FIGURE 13

STEP 14

14. Attach the two long ends of the 16' criss-cross straps (27) to the bottom tree blade (17). These long stabilizer straps should be attached by pulling the free end of the strap through the loop end of the strap to create a cinch knot around the frame tube. **SEE FIGURES 14A AND 14B.**

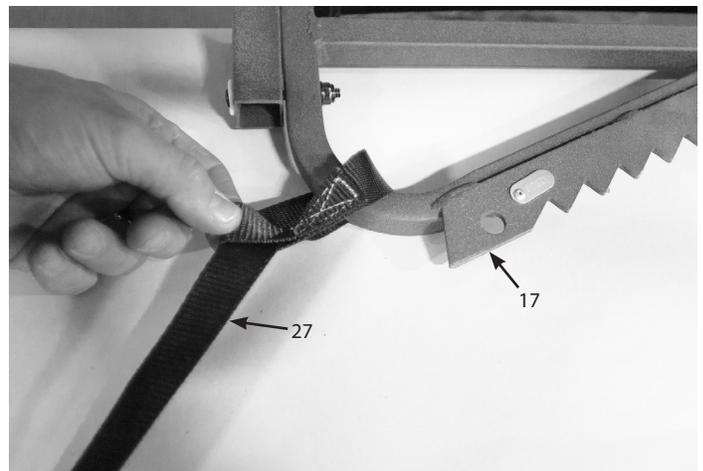


FIGURE 14A

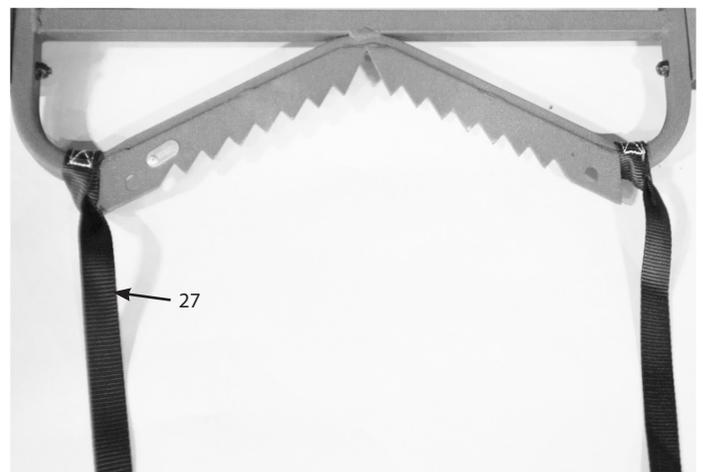


FIGURE 14B

 **STOP****READ AND UNDERSTAND THE FOLLOWING WARNINGS BEFORE SETUP AND USE** **WARNING**

- ▲ Double check assembly steps to be certain you have correctly assembled this product.
- ▲ Study your new stand to become familiar with all of its features and design. At ground level, following provided use instructions, practice attaching stand to tree and removing stand from tree. Practice sitting, standing, and using this product before attaching overhead. Save these instructions for future reference. You must always use the provided Fall Arrest System (FAS) while using this product.
- ▲ **Always** use at least three (3) people to install or take down a ladder treestand. **Always** have two people stabilize the ladder before climbing to the platform the first time after every set-up.
- ▲ Be absolutely sure the tree blade(s) on stand and the stabilizer bar are contacting tree before climbing ladder.
- ▲ Stabilizer bar must always be correctly and securely attached to ladder and tree before climbing ladder.
- ▲ Make sure ladder bottom is firmly seated on dry, level ground. Attach your harness tether to the tree before securing the platform to the tree and stepping onto platform. Refer to the Full Body Harness instructions.
- ▲ **Never** ascend or descend ladder without criss-cross straps/ropes securely holding ladder to tree and stabilizer bar securely attached. Failure to correctly perform these steps can cause the ladder to collapse/buckle-over backwards during the initial ascent to attach ratchet strap resulting in serious injury or death.
- ▲ **Always** lean forward as you climb and attach your harness to the tree before securing the platform to the tree and stepping onto the platform.

 **WARNING**

- ▲ **Always** maintain three (3) points of contact when climbing a ladder treestand. Proper three-point contact means having either two feet with one hand or one foot with two hands on the step portion of the ladder or climbing aid at all times.
- ▲ **Always** wear the appropriate footwear when using a ladder treestand. A good non-slip safety boot is important to your personal safety. Be especially careful that boot laces do not get hooked on the stand or any of its components (tuck shoelaces into boots before climbing).
- ▲ **Never** stand on seat, it is designed for sitting only.
- ▲ **Do Not** allow excessive strap buildup in ratchet as this will prevent the ratchet teeth from engaging causing slippage.
- ▲ **Always** attach ratchet straps securely while using this product!
- ▲ If seat is removable, be certain it is securely attached when in use.
- ▲ Some models include a shooting rail. **Never** lean against, lean over, or sit on shooting rail. It is designed as a shooting rest only. **Always** be aware that the shooting rail can swing to one side or pivot up and down.
- ▲ Some models include a footrest, which is designed as a footrest only. **Never** stand on footrest! **Always** be fully aware of foot placement.
- ▲ Some models include a multi-piece stabilizer bar system. Be sure attachment hardware goes through both the extension tube and the stabilizer bar.

 **WARNING**

- ▲ Bring ratchet strap(s) up with you in a pocket - **Do Not** carry in your hands!
- ▲ Be sure only one person ascends or descends ladder at a time. Be certain first person is seated safely, and attached to tree with provided Fall Arrest System (FAS) correctly before second person ascends or descends ladder.
- ▲ **Never** have two people on one side of the platform. Keep weight evenly distributed on platform.
- ▲ **Always** be aware of the other person's position. Use extreme caution when weapons are used to prevent personal injury.

INSTALLATION AND USE INSTRUCTIONS

WARNING

- ▲ **Never** use a treestand on a dead, leaning, diseased or loose barked tree, or a utility pole. **Always** avoid electrical power lines.
- ▲ Bring ratchet strap(s) up with you in a pocket - **Do Not** carry in your hands!

During installation and removal of ladder treestands, you must always and properly use the included Full Body Harness (Fall Arrest System). Refer to the Full Body Harness instructions included with this product for proper use.

STEP 1

1. With assembled product lying on the ground, **position one person at bottom end of ladder lying on the ground.** This person has to prevent the ladder end from tilting up when platform end is lifted and prevent the ladder from skidding across ground.
2.
 - a. Position two people at the platform end of the ladder, lift the platform end and continue uprighting by walking toward bottom end of ladder and moving hands along ladder legs. **Stand ladder up against chosen straight tree on dry, level ground.** Use caution when ladder comes over center against the tree. **SEE FIGURE 15A.**
 - b. Step back and look at the ladder top to see that it is level. Adjust as needed to achieve a level platform top. Make sure tree blade is contacting tree. **SEE FIGURE 15B.**
 - c. Step down hard on bottom step to push ladder legs into the ground. **SEE FIGURE 15C.**

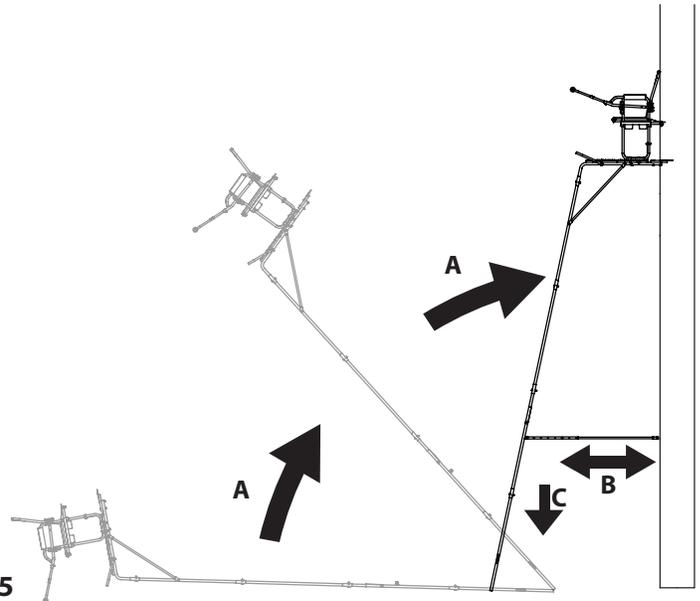


FIGURE 15

STEP 2

3. While two people hold the stand in place, the third person must connect the horizontal stabilizer bar to the tree. Adjust the length of the stabilizer bar as needed so it contacts the tree and is level to the ground. Then secure it to the tree with the 6' cam strap (28) by forming a cinch knot with both ends of the strap and running the long end of the strap through the cam buckle. **SEE FIGURES 16A AND 16B.**



FIGURE 16A



FIGURE 16B

STEP 3

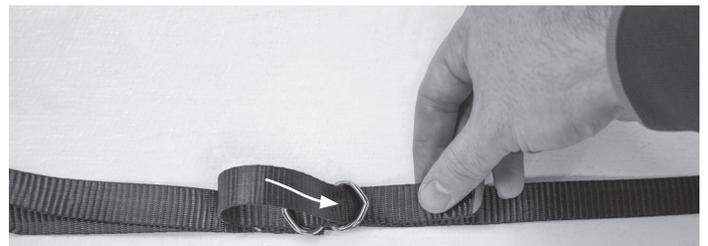
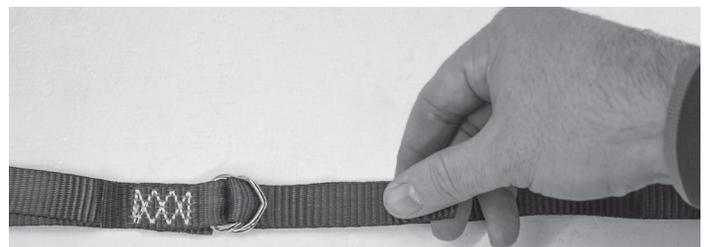
4. a. Loop the D-loop end of the two 16' criss cross straps (27) through the loop end to form a cinch knot around the ladder rail tube. Secure beneath a step rung, at the stabilizer bar height location. **SEE FIGURE 17A.**
 - b. With the stand level and being held in place by two people, the third person must cross one of the 16' criss cross straps (27) behind the tree and feed the free end through the opposite D-loop. **SEE FIGURE 17B-E.**
 - c. Criss cross the other 16' stabilizer strap (27), forming an "X" pattern on the of the tree and feed the free end through the opposite D-loop. **SEE FIGURE 17B-E.**
5. Make sure the criss cross straps and stabilizer bar strap are snug and the tree blade is still contacting the tree.

NOTE: This ground level ladder-to-tree attachment will prevent the ladder from pulling away from the tree while ascending to the top for final 6' ratchet strap (26) attachment. The same holds true when the ladder is removed.

6. **With two people securely holding the ladder,** use the three point contact climbing method to slowly climb the ladder and carefully keep a constant hand grip on the ladder at all times. Always lean forward, toward tree, to keep top section tree blades against the tree. **Be certain ladder bottom is firmly seated on dry, level ground. Attach your harness tether to the tree before securing the platform to the tree and stepping onto platform. Refer to the Full Body Harness instructions included with this product.**


FIGURE 17A

FIGURE 17B

FIGURE 17C

FIGURE 17D

FIGURE 17E

STEP 4

7a. Standing on ladder step, lean toward tree with ratchet strap (26) now in hand, hook “S” hook with long strap through hole provided on bottom tree blade. Feed the long strap through the center (slot) of ratcheting mechanism and back around through tightening lever. **SEE FIGURES 18A, 18B AND 19.**

NOTE: Be sure you feed the long strap correctly so there are no twists in the strap.

b. Wrap entire ratchet assembly around tree and hook other “S” hook through opposite upper tree blade hole. Pull tail of long strap until most of the slack is taken out. Be sure entire strap is even and at the same level all around tree. “Ratchet” tight to tree, this will securely attach ladder to tree and prevent movement. **SEE FIGURES 18B AND 18C.**

c. Repeat steps 7a-7b for top tree blade.

NOTE: Make sure there is at least two full revolutions of strap on the ratchet spool before the strap tightens. Proper tension will ensure the stand is secured to the tree. Do not allow excessive strap to build up in the ratchet as this will prevent the ratchet teeth from engaging and can cause slippage.

To release ratchet, simply pull the release lever and open tightening lever wide open (flat). SEE FIGURE 18D.

8. If necessary, re-check and adjust the 6’ ratchet straps (26), 16’ criss cross straps (27) and horizontal stabilizer bar assembly to securely attach the treestand to the tree. The tree blades must be touching the tree.

9. You are now ready to use your ladder stand!

IMPORTANT

Reverse the Set-Up and Use Instructions to take the ladder stand down.

FIGURE 18A

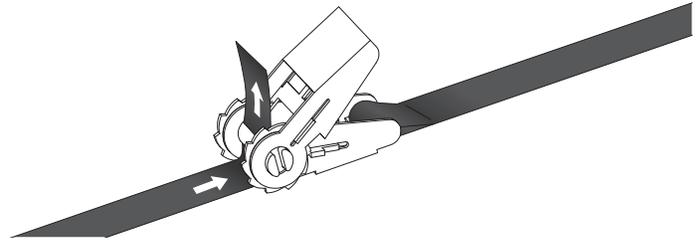


FIGURE 18B

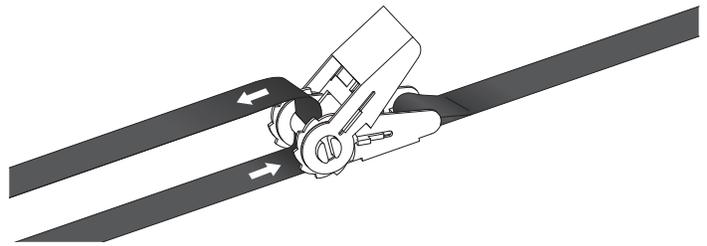


FIGURE 18C

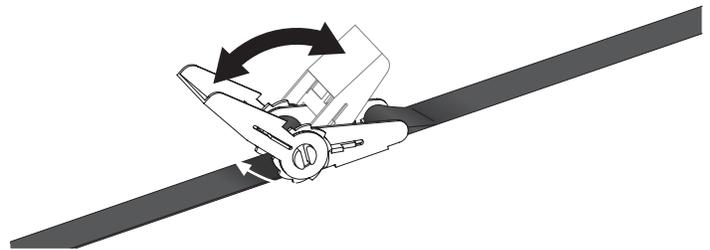


FIGURE 18D

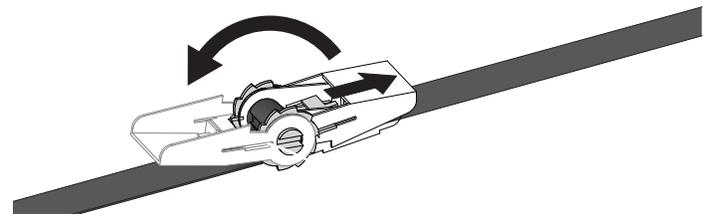
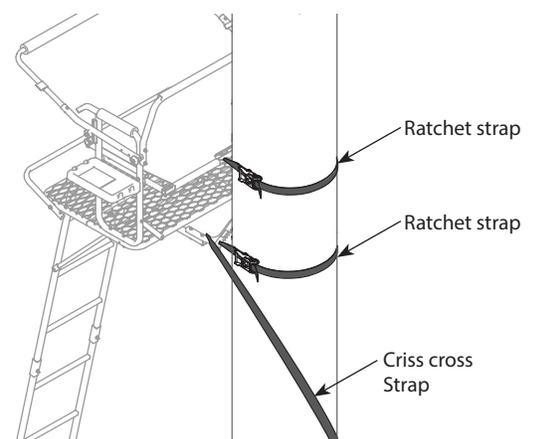


FIGURE 19



INSPECTION AND MAINTENANCE

BEFORE EACH USE PERFORM THE FOLLOWING:

- Inspect all webbing, rope, cord, and strap assemblies for wear or damage.
- Inspect cables and/or cable ends for damage or kinking.
- Inspect all hardware and chain components for damage or wear.
- Inspect for any structural damage to product. (If any exists stop use immediately and call RETI Customer Service.)
- Inspect all nut and bolt assemblies to be certain none are loose.
- Inspect for any missing parts.
- Lubricate all pivot and slide together points with powder graphite, petroleum jelly or silicone spray to prevent noise, wear and rust.
- Inspect entire product for any rust, corrosion, cracks, freezing, excessive heat or rotting damage that may effect the safety of your product. Discard any questionable product.
- Inspect entire product for any structural damage - pay close attention to all weld locations. (Discard product if any damage is found.)
- Using correct wrenches inspect all nut & bolt assembly locations and snug up any that may be loose. Be careful not to crush tubing when tightening!
- Inspect and check operation of all cables, cable ends, cord, rope, webbing, and strap or chain assemblies. Replace with RETI original replacement parts any item or assembly that shows signs of wear, damage, kinking, or functions incorrectly.
- Inspect seat for damage or wear. Replace any seat with factory new that shows signs of structural damage or wear.
- Never modify your stand in any way by making repairs, replacing parts, or altering by adding or attaching anything to it except if explicitly authorized in writing by the manufacturer.



GAME WINNER™